

0309086
<https://www.phoenixcontact.com/pc/products/0309086>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Test disconnect terminal block, with slide, nom. voltage: 500 V, nominal current: 41 A, connection method: Screw connection, 1 level, Rated cross section: 6 mm², cross section: 0.5 mm² - 10 mm², mounting type: NS 35/7,5, NS 35/15, NS 32, color: gray

Commercial data

Item number	0309086
Packing unit	50 pc
Minimum order quantity	1 pc
Product key	BE1233
GTIN	4017918001025
Weight per piece (including packing)	34.58 g
Weight per piece (excluding packing)	31.645 g
Customs tariff number	85369010
Country of origin	DE

URTK/S-BEN - Test disconnect terminal block



0309086

<https://www.phoenixcontact.com/pc/products/0309086>

Technical data

Product properties

Product type	Test disconnect terminal block
Number of connections	2
Number of rows	1
Potentials	1

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	6 kV
---------------------	------

Connection data

Number of connections per level	2
Nominal cross section	6 mm ²
Tightening torque disconnect slide	M3 0.6 ... 0.8 Nm

1 level

Connection method	Screw connection
Screw thread	M4
Note	Terminal point
Tightening torque	1.5 ... 1.8 Nm
Stripping length	10 mm
Connection in acc. with standard	IEC 60947-7-1
Conductor cross-section rigid	0.5 mm ² ... 10 mm ²
Cross section AWG	20 ... 8 (converted acc. to IEC)
Conductor cross-section flexible	0.5 mm ² ... 6 mm ²
Conductor cross-section, flexible [AWG]	20 ... 10 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.5 mm ² ... 6 mm ²
Flexible conductor cross-section (ferrule with plastic sleeve)	0.5 mm ² ... 4 mm ²
Cross-section with insertion bridge, rigid	10 mm ²
Cross-section with insertion bridge, flexible	6 mm ²
2 conductors with same cross section, solid	0.5 mm ² ... 2.5 mm ²
2 conductors with same cross section, flexible	0.5 mm ² ... 6 mm ²
2 conductors with same cross section, flexible, with ferrule without plastic sleeve	0.5 mm ² ... 4 mm ²
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm ² ... 4 mm ²
Nominal current	41 A
Maximum load current	57 A (with 10 mm ² conductor cross-section)
Nominal voltage	500 V
Nominal cross section	6 mm ²

URTK/S-BEN - Test disconnect terminal block



0309086

<https://www.phoenixcontact.com/pc/products/0309086>

Dimensions

Width	8.2 mm
End cover width	2.2 mm

Material specifications

Color	gray
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	125 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Calorimetric heat release NFPA 130 (ASTM E 1354)	27,5 MJ/kg
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

Electrical tests

Surge voltage test

Test voltage setpoint	7.3 kV
Result	Test passed

Temperature-rise test

Requirement temperature-rise test	Increase in temperature ≤ 45 K
Result	Test passed
Short-time withstand current 6 mm ²	0.72 kA
Short-time withstand current 10 mm ²	1.2 kA
Result	Test passed

Power-frequency withstand voltage

Test voltage setpoint	1.89 kV
Result	Test passed

Mechanical properties

Mechanical data

Open side panel	Yes
-----------------	-----

Mechanical tests

URTK/S-BEN - Test disconnect terminal block



0309086

<https://www.phoenixcontact.com/pc/products/0309086>

Mechanical strength

Result	Test passed
--------	-------------

Attachment on the carrier

DIN rail/fixing support	NS 32/NS 35
Test force setpoint	5 N
Result	Test passed

Test for conductor damage and slackening

Rotation speed	10 rpm
Revolutions	135
Conductor cross-section/weight	0.5 mm ² / 0.3 kg
	6 mm ² / 1.4 kg
	10 mm ² / 2 kg
Result	Test passed

Environmental and real-life conditions

Needle-flame test

Time of exposure	30 s
Result	Test passed

Standards and regulations


Connection in acc. with standard	IEC 60947-7-1
----------------------------------	---------------

Mounting

Mounting type	NS 35/7,5
	NS 35/15
	NS 32
Screw thread	M3

Drawings

Schematic diagram

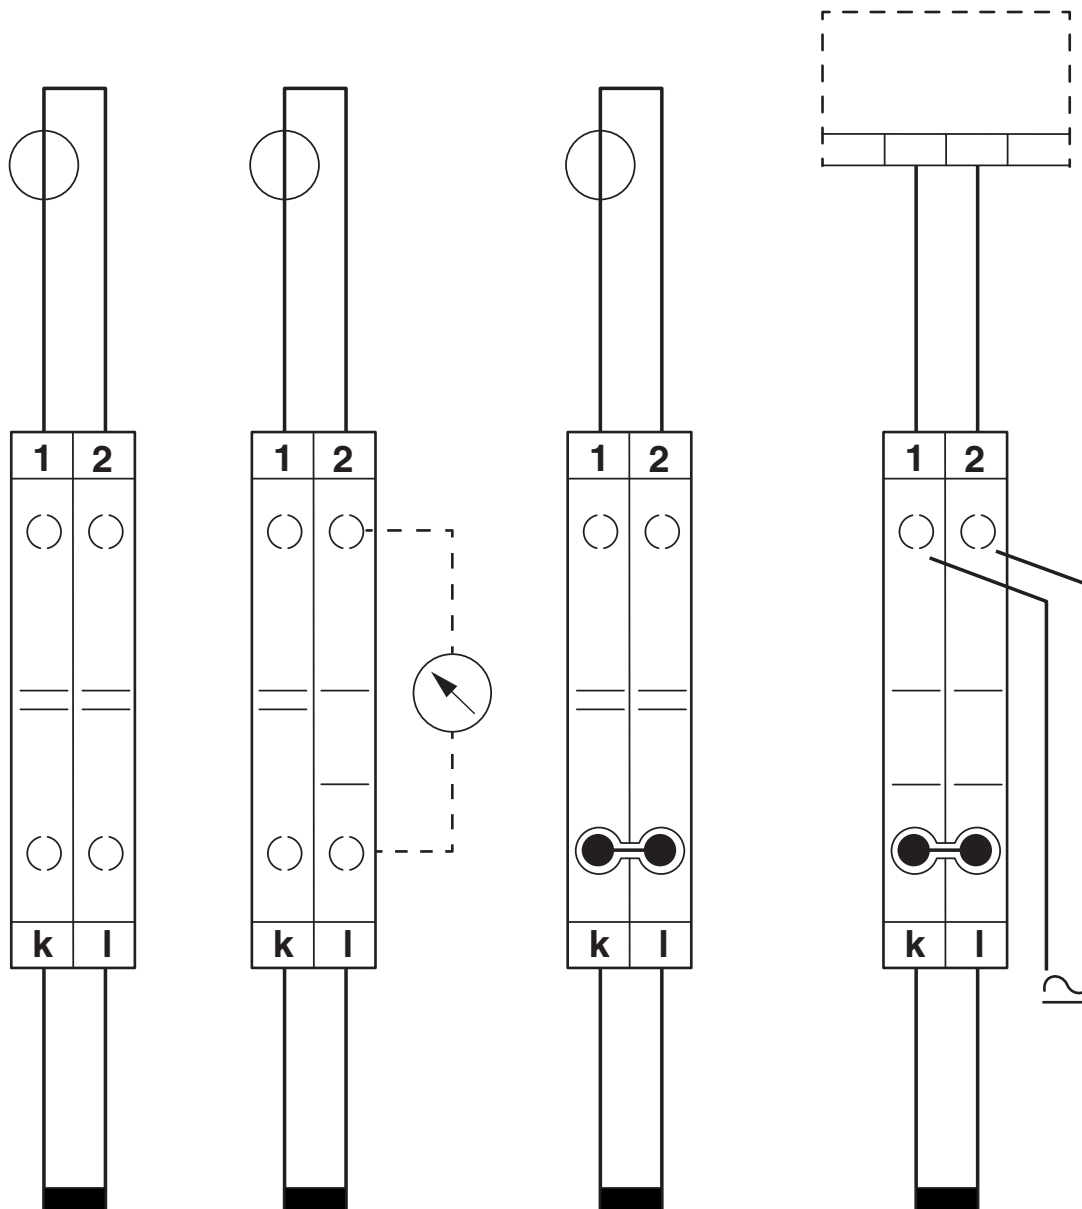

Simple current transformer test circuit

a = normal operation

b = measured value testing

c = transformer short-circuit

d = relay testing


Circuit diagram



0309086

<https://www.phoenixcontact.com/pc/products/0309086>

Circuit diagram

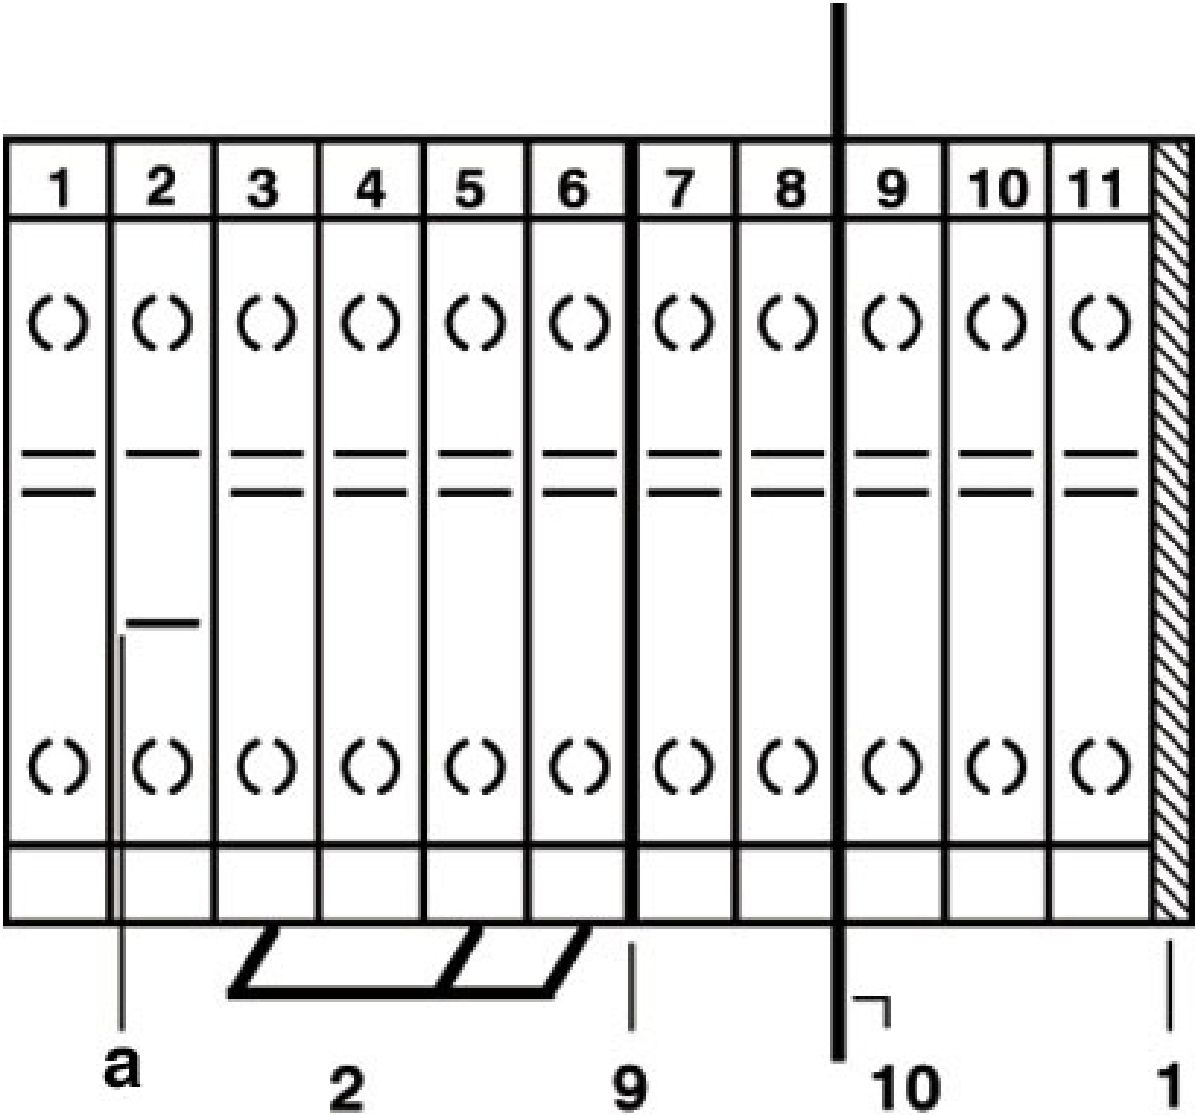

- a = open
- 1 = cover
- 2 = insertion bridge
- 9 = separating plate
- 10 = partition plate

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)

China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
-------------------------------------	----------------------

URTK/S-BEN - Test disconnect terminal block



0309086

<https://www.phoenixcontact.com/pc/products/0309086>

Accessories

i Note: Applying some accessories below might limit this product.

EB 2- 8 - Insertion bridge

0202154

<https://www.phoenixcontact.com/pc/products/0202154>




Insertion bridge, pitch: 8 mm, number of positions: 2, color: gray

i Max. current carrying capacity: 46 A

EB 3- 8 - Insertion bridge

0202141

<https://www.phoenixcontact.com/pc/products/0202141>



Insertion bridge, pitch: 8 mm, number of positions: 3, color: gray

i Max. current carrying capacity: 46 A

URTK/S-BEN - Test disconnect terminal block




0309086

<https://www.phoenixcontact.com/pc/products/0309086>

EB 10- 8 - Insertion bridge

0202138

<https://www.phoenixcontact.com/pc/products/0202138>



Insertion bridge, pitch: 8 mm, number of positions: 10, color: gray

 Max. current carrying capacity: 46 A

S - Switching lock

0308359

<https://www.phoenixcontact.com/pc/products/0308359>



Switching lock, for disconnect slides, width: 8.2 mm, height: 12 mm, color: white

URTK/S-BEN - Test disconnect terminal block



0309086

<https://www.phoenixcontact.com/pc/products/0309086>

EB 4- 8 - Insertion bridge

0202142

<https://www.phoenixcontact.com/pc/products/0202142>

Insertion bridge, pitch: 8 mm, number of positions: 4, color: gray




 Max. current carrying capacity: 41 A

EB 1/3/5/7-8 - Insertion bridge

3072340

<https://www.phoenixcontact.com/pc/products/3072340>

Insertion bridge, pitch: 16.4 mm, number of positions: 4, pin assignment: 1, 3, 5, 7, length: 24 mm, color: gray



 Max. current carrying capacity: 41 A

URTK/S-BEN - Test disconnect terminal block




0309086

<https://www.phoenixcontact.com/pc/products/0309086>

EB 1/3/5-8 - Insertion bridge

3072341

<https://www.phoenixcontact.com/pc/products/3072341>



Insertion bridge, pitch: 16.4 mm, number of positions: 3, pin assignment: 1,3,5, length: 24 mm, color: gray

 Max. current carrying capacity: 41 A

D-URTK/S-BEN - End cover

0308029

<https://www.phoenixcontact.com/pc/products/0308029>



End cover, depth: 48.5 mm, width: 2.2 mm, height: 61 mm, color: gray

URTK/S-BEN - Test disconnect terminal block

0309086

<https://www.phoenixcontact.com/pc/products/0309086>



SCP 4-8 - Short-circuit connector

3070404

<https://www.phoenixcontact.com/pc/products/3070404>

Short-circuit connector, pitch: 8.15 mm, number of positions: 4, color: orange



TS-RTK-BEN - Separating plate

0308210

<https://www.phoenixcontact.com/pc/products/0308210>

Separating plate, width: 0.8 mm, height: 61 mm, color: gray



URTK/S-BEN - Test disconnect terminal block



0309086

<https://www.phoenixcontact.com/pc/products/0309086>

ATS-RTK-BEN - Partition plate

0308223

<https://www.phoenixcontact.com/pc/products/0308223>

Partition plate, depth: 52 mm, width: 0.8 mm, height: 61 mm, color: gray



SBS 8:UNBEDRUCKT - Marker card

1007235

<https://www.phoenixcontact.com/pc/products/1007235>

Marker card, Card, white, unmarked, can be labeled with: Marker pen, mounting type: snap into tall marker groove, snap into flat marker groove, for terminal block width: 8 mm



URTK/S-BEN - Test disconnect terminal block



0309086

<https://www.phoenixcontact.com/pc/products/0309086>

SZG 0,9X6,5 VDE - Screwdriver

1205134

<https://www.phoenixcontact.com/pc/products/1205134>



Screwdriver, slot-headed, graded, for test socket screws, size: 0.9 x 6.5 x 175 mm, 2-component grip, with non-slip grip

TS-UK 6-T - Separating plate

3072820

<https://www.phoenixcontact.com/pc/products/3072820>



Separating plate, depth: 62.5 mm, width: 1 mm, height: 66.5 mm, color: gray

URTK/S-BEN - Test disconnect terminal block



0309086

<https://www.phoenixcontact.com/pc/products/0309086>

ATS-U M - Partition plate

1742990

<https://www.phoenixcontact.com/pc/products/1742990>

Partition plate, width: 1 mm, height: 69.1 mm, color: gray



ATS-U L - Partition plate

1742989

<https://www.phoenixcontact.com/pc/products/1742989>

Partition plate, width: 1 mm, height: 83.2 mm, color: gray



URTK/S-BEN - Test disconnect terminal block



0309086

<https://www.phoenixcontact.com/pc/products/0309086>

NS 32 PERF 2000MM-VPE 10 - DIN rail perforated

1201002

<https://www.phoenixcontact.com/pc/products/1201002>



DIN rail perforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, G profile, color: silver

NS 32 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201015

<https://www.phoenixcontact.com/pc/products/1201015>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, G profile, color: silver-colored

URTK/S-BEN - Test disconnect terminal block



0309086

<https://www.phoenixcontact.com/pc/products/0309086>

NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

<https://www.phoenixcontact.com/pc/products/0801733>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

<https://www.phoenixcontact.com/pc/products/0801681>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver-colored

URTK/S-BEN - Test disconnect terminal block

0309086

<https://www.phoenixcontact.com/pc/products/0309086>

NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

<https://www.phoenixcontact.com/pc/products/1204119>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, white passivated, Standard profile, color: silver-colored

NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

<https://www.phoenixcontact.com/pc/products/1204122>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, white passivated, Standard profile, color: silver-colored

URTK/S-BEN - Test disconnect terminal block



0309086

<https://www.phoenixcontact.com/pc/products/0309086>

NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

<https://www.phoenixcontact.com/pc/products/0801704>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver-colored

NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

<https://www.phoenixcontact.com/pc/products/1206421>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, zinc plating, Standard profile, color: silver-colored

URTK/S-BEN - Test disconnect terminal block



0309086

<https://www.phoenixcontact.com/pc/products/0309086>

NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

<https://www.phoenixcontact.com/pc/products/1206434>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, zinc plating, Standard profile, color: silver-colored

NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

<https://www.phoenixcontact.com/pc/products/0801762>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

URTK/S-BEN - Test disconnect terminal block

0309086

<https://www.phoenixcontact.com/pc/products/0309086>



NS 35/ 7,5 CAP - End cap

1206560

<https://www.phoenixcontact.com/pc/products/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



NS 35/15 PERF 2000MM - DIN rail perforated

1201730

<https://www.phoenixcontact.com/pc/products/1201730>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver-colored

URTK/S-BEN - Test disconnect terminal block

0309086

<https://www.phoenixcontact.com/pc/products/0309086>

NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

<https://www.phoenixcontact.com/pc/products/1201714>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver-colored

NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

<https://www.phoenixcontact.com/pc/products/0806602>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, white passivated, Standard profile, color: white

URTK/S-BEN - Test disconnect terminal block

0309086

<https://www.phoenixcontact.com/pc/products/0309086>

NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

<https://www.phoenixcontact.com/pc/products/1204135>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Steel, galvanized, white passivated, Standard profile, color: silver-colored

NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

<https://www.phoenixcontact.com/pc/products/1201756>



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver-colored

URTK/S-BEN - Test disconnect terminal block



0309086

<https://www.phoenixcontact.com/pc/products/0309086>

NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

<https://www.phoenixcontact.com/pc/products/1206599>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, zinc plating, Standard profile, color: silver-colored

NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

<https://www.phoenixcontact.com/pc/products/1206586>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, zinc plating, Standard profile, color: silver-colored

URTK/S-BEN - Test disconnect terminal block



0309086

<https://www.phoenixcontact.com/pc/products/0309086>

NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

<https://www.phoenixcontact.com/pc/products/1201895>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

NS 35/15 CAP - End cap

1206573

<https://www.phoenixcontact.com/pc/products/1206573>

DIN rail end piece, for DIN rail NS 35/15



URTK/S-BEN - Test disconnect terminal block



0309086

<https://www.phoenixcontact.com/pc/products/0309086>

NS 35/15-2,3 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201798

<https://www.phoenixcontact.com/pc/products/1201798>




DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver-colored

ZB 8:UNBEDRUCKT - Zack marker strip

1052002

<https://www.phoenixcontact.com/pc/products/1052002>



Zack marker strip, Strip, white, unmarked, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: latching, for terminal block width: 8.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 8.15 mm

URTK/S-BEN - Test disconnect terminal block




0309086

<https://www.phoenixcontact.com/pc/products/0309086>

ZB 8 CUS - Zack marker strip

0825011

<https://www.phoenixcontact.com/pc/products/0825011>



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, Number of individual labels: 10, text field height: 8.15 mm, text field width: 10.5 mm

UC-TM 8 - Marker for terminal blocks

0818072

<https://www.phoenixcontact.com/pc/products/0818072>



Marker for terminal blocks, Sheet, white, unmarked, can be labeled with: BLUEMARK E.CARD, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: latching, for terminal block width: 8.2 mm, Number of individual labels: 56, text field height: 10.5 mm, text field width: 7.6 mm

URTK/S-BEN - Test disconnect terminal block

0309086

<https://www.phoenixcontact.com/pc/products/0309086>

UC-TM 8 CUS - Marker for terminal blocks

0824597

<https://www.phoenixcontact.com/pc/products/0824597>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, Number of individual labels: 56, text field height: 10.5 mm, text field width: 7.6 mm

UCT-TM 8 - Marker for terminal blocks

0828740

<https://www.phoenixcontact.com/pc/products/0828740>



Marker for terminal blocks, Sheet, white, unmarked, can be labeled with: BLUEMARK E.CARD, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME 2.0, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, TOPMARK NEO, TOPMARK LASER, mounting type: latching, for terminal block width: 8.2 mm, Number of individual labels: 42, text field height: 10.5 mm, text field width: 7.6 mm

URTK/S-BEN - Test disconnect terminal block

0309086

<https://www.phoenixcontact.com/pc/products/0309086>

UCT-TM 8 CUS - Marker for terminal blocks

0829616

<https://www.phoenixcontact.com/pc/products/0829616>




Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, Number of individual labels: 42, text field height: 10.5 mm, text field width: 7.6 mm

ZB 8,LGS:FORTL.ZAHLEN - Zack marker strip

1052015

<https://www.phoenixcontact.com/pc/products/1052015>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: latching, for terminal block width: 8.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 8.15 mm

URTK/S-BEN - Test disconnect terminal block



0309086

<https://www.phoenixcontact.com/pc/products/0309086>

ZB 8,QR:FORTL.ZAHLEN - Zack marker strip

1052028

<https://www.phoenixcontact.com/pc/products/1052028>




Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: latching, for terminal block width: 8.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 8.15 mm

ZB 8,LGS:L1-N,PE - Marker for terminal blocks

1052413

<https://www.phoenixcontact.com/pc/products/1052413>



Marker for terminal blocks, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, mounting type: latching, for terminal block width: 8.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 8.15 mm

URTK/S-BEN - Test disconnect terminal block

0309086

<https://www.phoenixcontact.com/pc/products/0309086>

CLIPFIX 35 - End bracket

3022218

<https://www.phoenixcontact.com/pc/products/3022218>

Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray



CLIPFIX 35-5 - End bracket

3022276

<https://www.phoenixcontact.com/pc/products/3022276>

Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray



URTK/S-BEN - Test disconnect terminal block



0309086


<https://www.phoenixcontact.com/pc/products/0309086>

E/NS 35 N - End bracket

0800886

<https://www.phoenixcontact.com/pc/products/0800886>

End clamp, width: 9.5 mm, color: gray




E/UK - End bracket

1201442

<https://www.phoenixcontact.com/pc/products/1201442>

End bracket, material: PA, mounting type: NS 35/7,5, NS 35/15, color: gray



URTK/S-BEN - Test disconnect terminal block



0309086

<https://www.phoenixcontact.com/pc/products/0309086>

E/UK 1 - End bracket

1201413

<https://www.phoenixcontact.com/pc/products/1201413>



End clamps, for supporting the ends of double-level and three-level terminal blocks, width: 10 mm, color: gray

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG

Flachsmarktstraße 8

D-32825 Blomberg

+49 (0) 5235-3 00

info@phoenixcontact.com