

URTK/S - Test disconnect terminal block



0311087

<https://www.phoenixcontact.com/ae/products/0311087>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Test disconnect terminal block, with two test sockets for 4 mm test plugs, or for receiving bridge bars or screw bridges, nom. voltage: 400 V, nominal current: 41 A, connection method: Screw connection, Rated cross section: 6 mm², cross section: 0.5 mm² - 10 mm², mounting type: NS 35/7,5, NS 35/15, NS 32, color: gray

Your advantages

- Easy and clear testing in current transformer secondary circuits can be performed using the test disconnect terminal blocks of the URTK/S range
- On both sides of the disconnect point, the terminal block has a test socket which can also be used to switch across to neighboring terminal blocks

Commercial data

Item number	0311087
Packing unit	50 pc
Minimum order quantity	50 pc
Sales key	BE1
Product key	BE1233
GTIN	4017918001292
Weight per piece (including packing)	35.51 g
Weight per piece (excluding packing)	35.51 g
Customs tariff number	85369010
Country of origin	CN

Technical data

Product properties

Product type	Test disconnect terminal block
Number of connections	2
Number of rows	1
Potentials	1

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	6 kV
Maximum power dissipation for nominal condition	1.31 W

Connection data

Number of connections per level	2
Nominal cross section	6 mm ²
Tightening torque disconnect slide	M3 0.6 ... 0.8 Nm
Connection method	Screw connection
Screw thread	M4
Tightening torque	1.2 ... 1.5 Nm
Stripping length	13 mm
Internal cylindrical gage	A5
Connection in acc. with standard	IEC 60947-7-1
Conductor cross-section rigid	0.5 mm ² ... 10 mm ²
Cross section AWG	20 ... 8 (converted acc. to IEC)
Conductor cross-section flexible	0.5 mm ² ... 6 mm ²
Conductor cross-section, flexible [AWG]	20 ... 10 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.5 mm ² ... 6 mm ²
Flexible conductor cross-section (ferrule with plastic sleeve)	0.5 mm ² ... 4 mm ²
2 conductors with same cross section, solid	0.5 mm ² ... 2.5 mm ²
2 conductors with same cross section, flexible	0.5 mm ² ... 6 mm ²
2 conductors with same cross section, flexible, with ferrule without plastic sleeve	0.5 mm ² ... 4 mm ²
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm ² ... 4 mm ²
Nominal current	41 A
Maximum load current	57 A (with 10 mm ² conductor cross-section)
Nominal voltage	400 V
Nominal cross section	6 mm ²

Dimensions

Width	8.2 mm
-------	--------

URTK/S - Test disconnect terminal block



0311087

<https://www.phoenixcontact.com/ae/products/0311087>

End cover width	2.2 mm
Height	72 mm
Depth on NS 32	56.5 mm
Depth on NS 35/7,5	51.5 mm
Depth on NS 35/15	59 mm

Material specifications

Color	gray (RAL 7042)
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

Electrical tests

Surge voltage test

Test voltage setpoint	7.3 kV
Result	Test passed

Temperature-rise test

Requirement temperature-rise test	Increase in temperature ≤ 45 K
Result	Test passed
Short-time withstand current 6 mm ²	0.72 kA
Result	Test passed

Power-frequency withstand voltage

Test voltage setpoint	1.89 kV
Result	Test passed

Mechanical properties

Mechanical data

Open side panel	Yes
-----------------	-----

Mechanical tests

Mechanical strength

Result	Test passed
--------	-------------

URTK/S - Test disconnect terminal block



0311087

<https://www.phoenixcontact.com/ae/products/0311087>

Attachment on the carrier

DIN rail/fixing support	NS 32/NS 35
Test force setpoint	5 N
Result	Test passed

Test for conductor damage and slackening

Rotation speed	10 (+/- 2) rpm
Revolutions	135
Conductor cross-section/weight	0.5 mm ² / 0.3 kg
	6 mm ² / 1.4 kg
	10 mm ² / 2 kg
Result	Test passed

Environmental and real-life conditions

Needle-flame test

Time of exposure	30 s
Result	Test passed

Oscillation/broadband noise

Specification	DIN EN 50155 (VDE 0115-200):2022-06
Spectrum	Long life test category 2, bogie-mounted
Frequency	$f_1 = 5 \text{ Hz}$ to $f_2 = 250 \text{ Hz}$
ASD level	6.12 (m/s ²) ² /Hz
Acceleration	3.12g
Test duration per axis	5 h
Test directions	X-, Y- and Z-axis
Result	Test passed

Shocks

Pulse shape	Half-sine
Acceleration	30g
Shock duration	18 ms
Number of shocks per direction	3
Test directions	X-, Y- and Z-axis (pos. and neg.)
Result	Test passed

Ambient conditions

Ambient temperature (operation)	-60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

URTK/S - Test disconnect terminal block



0311087

<https://www.phoenixcontact.com/ae/products/0311087>

Standards and regulations

Connection in acc. with standard	IEC 60947-7-1
----------------------------------	---------------

Mounting

Mounting type	NS 35/7,5
	NS 35/15
	NS 32
Screw thread	M3

URTK/S - Test disconnect terminal block


0311087

<https://www.phoenixcontact.com/ae/products/0311087>



Drawings

Schematic diagram

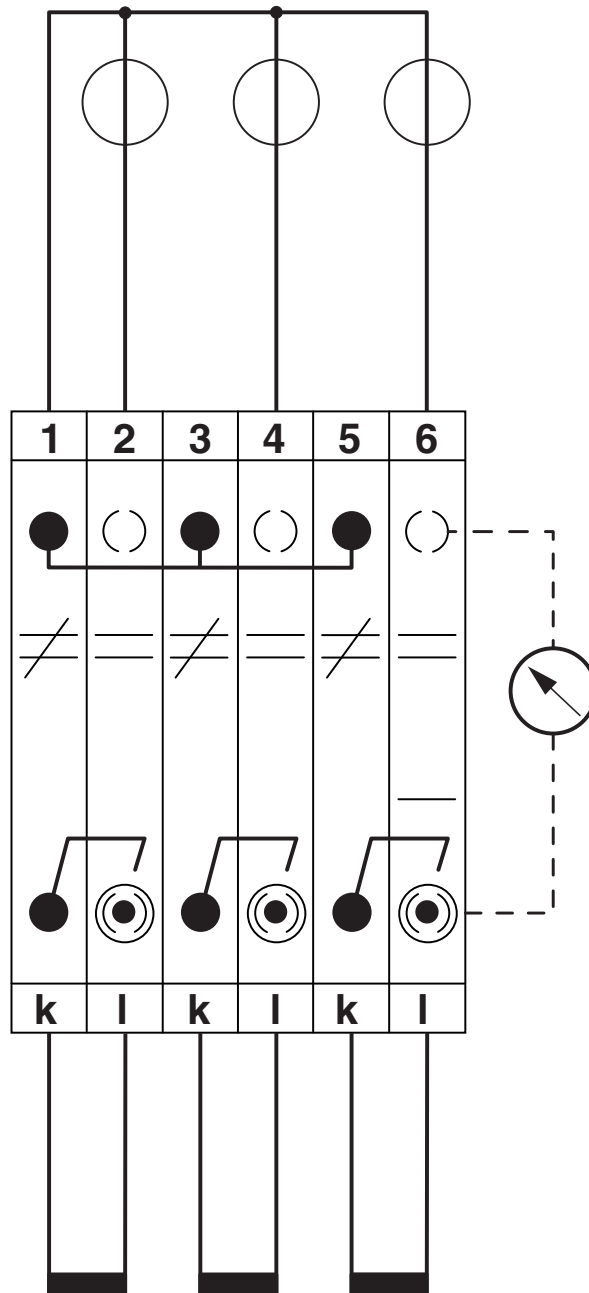

Three-phase transducer test set


URTK/S - Test disconnect terminal block

0311087

<https://www.phoenixcontact.com/ae/products/0311087>




Schematic diagram

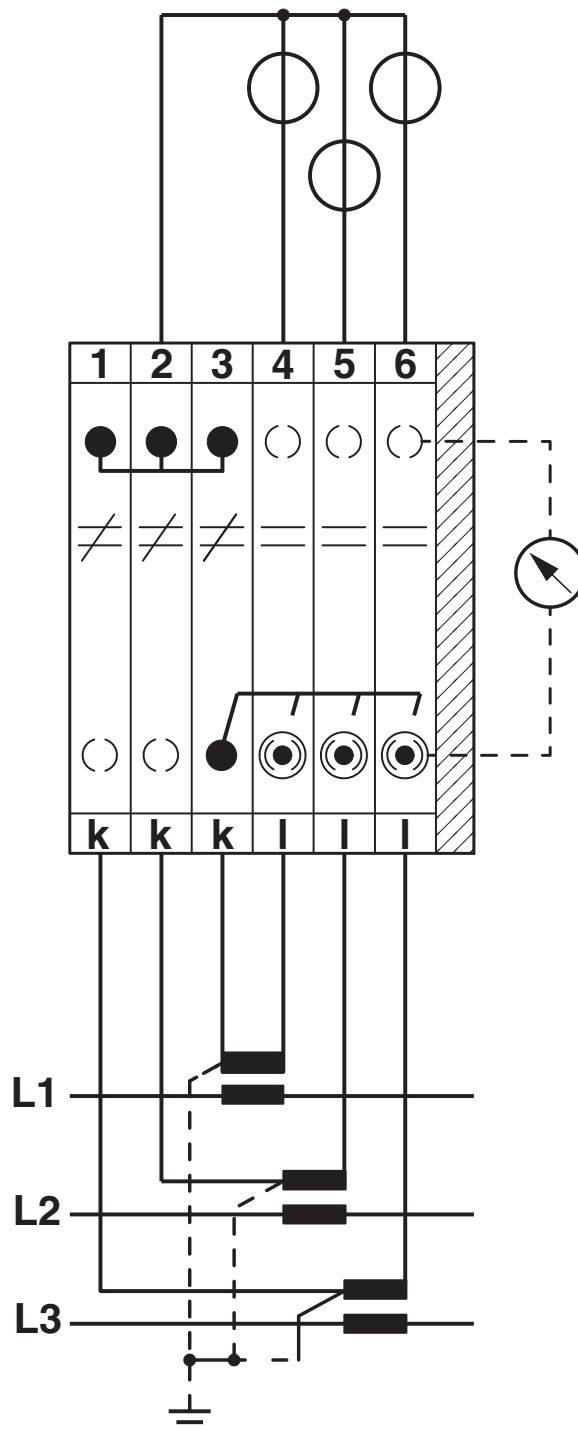

Three-phase linked transducer test set

Schematic diagram

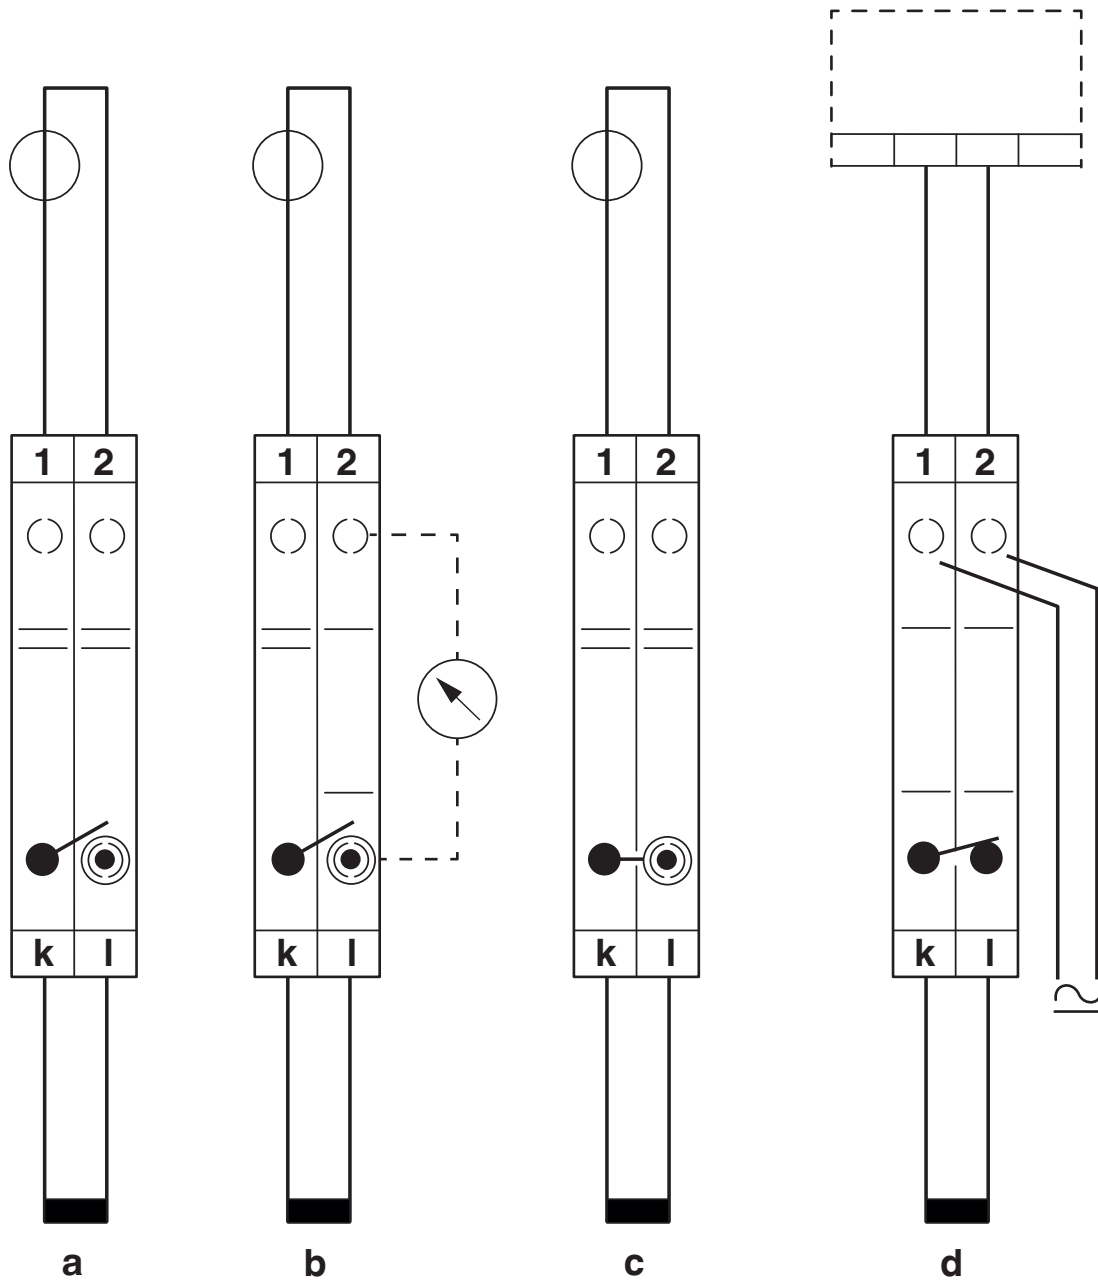

Simple current transformer test circuit

a = normal operation

b = measured value testing


c = transformer short-circuit

d = relay testing

Circuit diagram



Circuit diagram

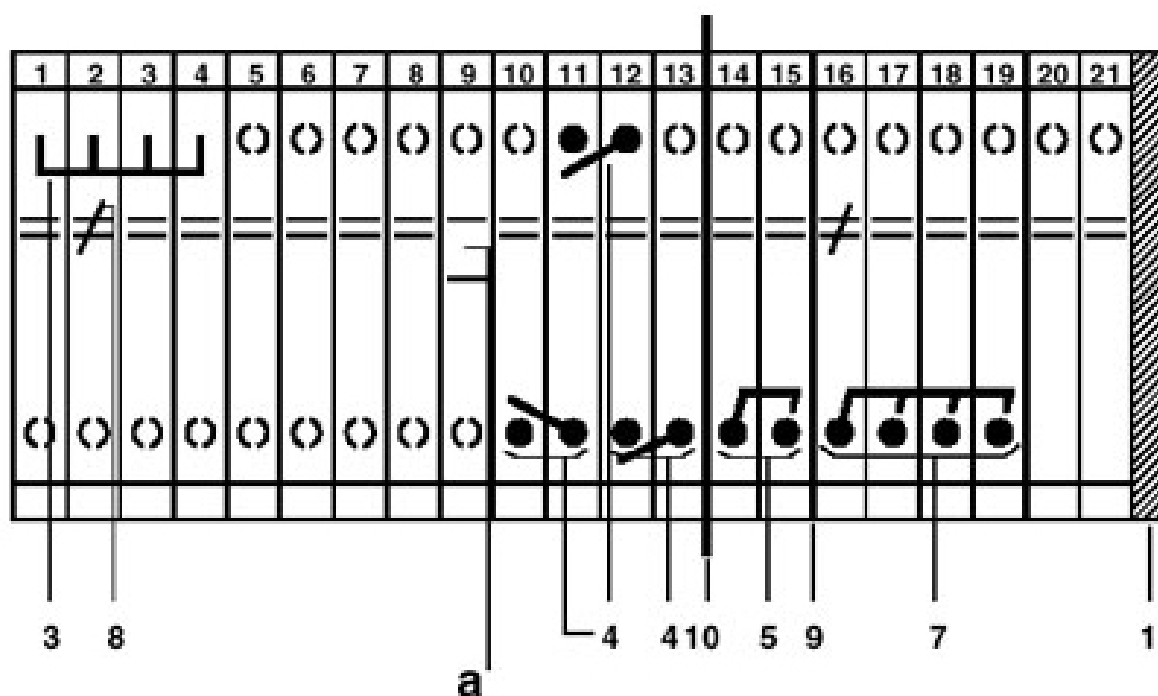

a = open

1 = cover

3 = fixed bridge

4 = switch bar, for 2 terminal blocks, useable on both sides of the disconnect point, inward switching motion

5 = switch bar, for 2 terminal blocks, useable on both sides of the disconnect point, outward switching motion

7 = switch bar, for 3-phase short-circuiting of linked current transformer sets, only on the right

8 = switching lock, prevents disconnect slide from being actuated

9 = separating plate, for electrical separation of neighboring bridges in terminal center

10 = partition plate

URTK/S - Test disconnect terminal block



0311087

<https://www.phoenixcontact.com/ae/products/0311087>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/ae/products/0311087>

 CSA Approval ID: 13631				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
keine				
	300 V	40 A	26 - 10	-

 IECEE CB Scheme Approval ID: NL-65058				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
keine				
	400 V	-	-	- 6

 EAC Approval ID: KZ7500651131219505				
---	--	--	--	--

 cULus Recognized Approval ID: E60425				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
B				
	300 V	50 A	26 - 8	-
C				
	300 V	50 A	26 - 8	-

 KEMA-KEUR Approval ID: 71-113436 REV.1				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
keine				
	400 V	-	-	- 6

DNV Approval ID: TAE00001CT				
---------------------------------------	--	--	--	--

0311087

<https://www.phoenixcontact.com/ae/products/0311087>

Classifications

ECLASS

ECLASS-13.0	27250109
ECLASS-15.0	27250109

ETIM

ETIM 9.0	EC000902
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%
EF3.0 Climate Change	
CO2e kg	0.337 kg CO2e

URTK/S - Test disconnect terminal block

0311087

<https://www.phoenixcontact.com/ae/products/0311087>

Accessories

i Note: Applying some accessories below might limit this product.

FB 10- RTK/S - Screw bridge

0311171

<https://www.phoenixcontact.com/ae/products/0311171>



Screw bridge, pitch: 8.2 mm, number of positions: 10, color: silver-colored

i Max. current carrying capacity: 41 A

EB 2- 8 - Insertion bridge

0202154

<https://www.phoenixcontact.com/ae/products/0202154>



Insertion bridge, pitch: 8 mm, number of positions: 2, color: gray

i Max. current carrying capacity: 41 A

URTK/S - Test disconnect terminal block


0311087

<https://www.phoenixcontact.com/ae/products/0311087>

EB 3- 8 - Insertion bridge

0202141

<https://www.phoenixcontact.com/ae/products/0202141>




Insertion bridge, pitch: 8 mm, number of positions: 3, color: gray

 Max. current carrying capacity: 41 A

EB 10- 8 - Insertion bridge

0202138

<https://www.phoenixcontact.com/ae/products/0202138>



Insertion bridge, pitch: 8 mm, number of positions: 10, color: gray

 Max. current carrying capacity: 41 A

URTK/S - Test disconnect terminal block

0311087

<https://www.phoenixcontact.com/ae/products/0311087>

SB 4-RTK/S - Bridge bar

0311265

<https://www.phoenixcontact.com/ae/products/0311265>



Bridge bar, pitch: 8.2 mm, number of positions: 4, color: silver-colored

 Max. current carrying capacity: 35 A

SB 2-RTK/S - Bridge bar

0311236

<https://www.phoenixcontact.com/ae/products/0311236>



Bridge bar, pitch: 8.2 mm, number of positions: 2, color: silver-colored

 Max. current carrying capacity: 35 A

URTK/S - Test disconnect terminal block



0311087

<https://www.phoenixcontact.com/ae/products/0311087>

EB 4- 8 - Insertion bridge

0202142

<https://www.phoenixcontact.com/ae/products/0202142>

Insertion bridge, pitch: 8 mm, number of positions: 4, color: gray




 Max. current carrying capacity: 41 A

EB 1/3/5/7-8 - Insertion bridge

3072340

<https://www.phoenixcontact.com/ae/products/3072340>

Insertion bridge, pitch: 16.4 mm, number of positions: 4, pin assignment: 1, 3, 5, 7, length: 24 mm, color: gray



 Max. current carrying capacity: 41 A

URTK/S - Test disconnect terminal block


0311087

<https://www.phoenixcontact.com/ae/products/0311087>

EB 1/3/5-8 - Insertion bridge

3072341

<https://www.phoenixcontact.com/ae/products/3072341>



Insertion bridge, pitch: 16.4 mm, number of positions: 3, pin assignment: 1,3,5, length: 24 mm, color: gray

 Max. current carrying capacity: 41 A

D-URTK - Cover

0310020

<https://www.phoenixcontact.com/ae/products/0310020>



Cover, depth: 41.5 mm, width: 2.2 mm, height: 72 mm, color: gray

URTK/S - Test disconnect terminal block



0311087

<https://www.phoenixcontact.com/ae/products/0311087>

TS-RTK - Partition plate

0310211

<https://www.phoenixcontact.com/ae/products/0310211>

Partition plate, width: 0.8 mm, height: 72 mm, color: gray



ATS-RTK - Partition plate

0310224

<https://www.phoenixcontact.com/ae/products/0310224>

Partition plate, depth: 45.8 mm, width: 0.8 mm, height: 97.5 mm, color: gray



URTK/S - Test disconnect terminal block



0311087

<https://www.phoenixcontact.com/ae/products/0311087>

SBS 8:UNBEDRUCKT - Marker card

1007235

<https://www.phoenixcontact.com/ae/products/1007235>



Marker card, Card, white, unmarked, can be labeled with: Marker pen, mounting type: snap into tall marker groove, snap into flat marker groove, for terminal block width: 8 mm

AP-ME

METER - Cover profile

3034361

<https://www.phoenixcontact.com/ae/products/3034361>



Cover profile, for covering terminal strips, snapped onto APT-ME cover profile carrier or APH-ME end bracket. A cover profile carrier should be positioned at the ends and at intervals of around 40 cm. Length supplied: 1 m

URTK/S - Test disconnect terminal block


0311087

<https://www.phoenixcontact.com/ae/products/0311087>

APH-ME - Cover profile carrier

3034374

<https://www.phoenixcontact.com/ae/products/3034374>



Cover profile carrier, for mounting on NS 35/7,5 DIN rail, for fixing the AP-ME cover profile, including mounting screws and plastic knurled nuts, can be sealed as an option

APT-ME - Cover profile carrier

3034358

<https://www.phoenixcontact.com/ae/products/3034358>



Cover profile carrier for mounting on NS 35/7.5 DIN rail for attaching the cover profile AP-ME

URTK/S - Test disconnect terminal block

0311087

<https://www.phoenixcontact.com/ae/products/0311087>



TS-UK 6-T - Separating plate

3072820

<https://www.phoenixcontact.com/ae/products/3072820>



Separating plate, depth: 62.5 mm, width: 1 mm, height: 66.5 mm, color: gray

SCP 2-8 - Short-circuit connector

3070402

<https://www.phoenixcontact.com/ae/products/3070402>



Short-circuit connector, pitch: 8.15 mm, number of positions: 2, color: orange

URTK/S - Test disconnect terminal block

0311087

<https://www.phoenixcontact.com/ae/products/0311087>

SCP 3-8 - Short-circuit connector

3070403

<https://www.phoenixcontact.com/ae/products/3070403>

Short-circuit connector, pitch: 8.15 mm, number of positions: 3, color: orange



SCP 4-8 - Short-circuit connector

3070404

<https://www.phoenixcontact.com/ae/products/3070404>

Short-circuit connector, pitch: 8.15 mm, number of positions: 4, color: orange



URTK/S - Test disconnect terminal block

0311087

<https://www.phoenixcontact.com/ae/products/0311087>

SCPI 2-8 - Short-circuit connector

3070423

<https://www.phoenixcontact.com/ae/products/3070423>



Short-circuit connector, pitch: 8.15 mm, number of positions: 2, color: orange

SCPI 4-8 - Short-circuit connector

3070424

<https://www.phoenixcontact.com/ae/products/3070424>



Short-circuit connector, pitch: 8.15 mm, number of positions: 4, color: orange

URTK/S - Test disconnect terminal block

0311087

<https://www.phoenixcontact.com/ae/products/0311087>

S - Switching lock

0308359

<https://www.phoenixcontact.com/ae/products/0308359>



Switching lock, for disconnect slides, width: 8.2 mm, height: 12 mm, color: white

ASB 2-RTK/S - Bridge bar

0311281

<https://www.phoenixcontact.com/ae/products/0311281>



Bridge bar, pitch: 8.2 mm, number of positions: 2, color: silver-colored

URTK/S - Test disconnect terminal block

0311087

<https://www.phoenixcontact.com/ae/products/0311087>

USB 2-RTK/S - Bridge bar

0311278

<https://www.phoenixcontact.com/ae/products/0311278>

Bridge bar, pitch: 8.2 mm, number of positions: 2, color: silver-colored



ATS-U L - Partition plate

1742989

<https://www.phoenixcontact.com/ae/products/1742989>

Partition plate, width: 1 mm, height: 83.2 mm, color: gray



URTK/S - Test disconnect terminal block

0311087

<https://www.phoenixcontact.com/ae/products/0311087>

NS 32 PERF 2000MM-VPE 10 - DIN rail perforated

1201002

<https://www.phoenixcontact.com/ae/products/1201002>



DIN rail perforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, G profile, color: silver

NS 32 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201015

<https://www.phoenixcontact.com/ae/products/1201015>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, G profile, color: silver-colored

URTK/S - Test disconnect terminal block

0311087

<https://www.phoenixcontact.com/ae/products/0311087>

NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

<https://www.phoenixcontact.com/ae/products/0801733>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

<https://www.phoenixcontact.com/ae/products/0801681>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver-colored

URTK/S - Test disconnect terminal block

0311087

<https://www.phoenixcontact.com/ae/products/0311087>

NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

<https://www.phoenixcontact.com/ae/products/1204119>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, white passivated, Standard profile, color: silver-colored

NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

<https://www.phoenixcontact.com/ae/products/1204122>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, white passivated, Standard profile, color: silver-colored

URTK/S - Test disconnect terminal block

0311087

<https://www.phoenixcontact.com/ae/products/0311087>

NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

<https://www.phoenixcontact.com/ae/products/0801704>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver-colored

NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

<https://www.phoenixcontact.com/ae/products/1206421>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, zinc plating, Standard profile, color: silver-colored

URTK/S - Test disconnect terminal block

0311087

<https://www.phoenixcontact.com/ae/products/0311087>



NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

<https://www.phoenixcontact.com/ae/products/1206434>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, zinc plating, Standard profile, color: silver-colored

NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

<https://www.phoenixcontact.com/ae/products/0801762>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

URTK/S - Test disconnect terminal block

0311087

<https://www.phoenixcontact.com/ae/products/0311087>



NS 35/ 7,5 CAP - End cap

1206560

<https://www.phoenixcontact.com/ae/products/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



NS 35/15 PERF 2000MM - DIN rail perforated

1201730

<https://www.phoenixcontact.com/ae/products/1201730>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver-colored

URTK/S - Test disconnect terminal block

0311087

<https://www.phoenixcontact.com/ae/products/0311087>

NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

<https://www.phoenixcontact.com/ae/products/1201714>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver-colored

NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

<https://www.phoenixcontact.com/ae/products/0806602>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, white passivated, Standard profile, color: white

URTK/S - Test disconnect terminal block

0311087

<https://www.phoenixcontact.com/ae/products/0311087>

NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

<https://www.phoenixcontact.com/ae/products/1204135>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Steel, galvanized, white passivated, Standard profile, color: silver-colored

NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

<https://www.phoenixcontact.com/ae/products/1201756>



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver-colored

URTK/S - Test disconnect terminal block

0311087

<https://www.phoenixcontact.com/ae/products/0311087>

NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

<https://www.phoenixcontact.com/ae/products/1206599>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, zinc plating, Standard profile, color: silver-colored

NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

<https://www.phoenixcontact.com/ae/products/1206586>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, zinc plating, Standard profile, color: silver-colored

URTK/S - Test disconnect terminal block

0311087

<https://www.phoenixcontact.com/ae/products/0311087>

NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

<https://www.phoenixcontact.com/ae/products/1201895>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

NS 35/15 CAP - End cap

1206573

<https://www.phoenixcontact.com/ae/products/1206573>

DIN rail end piece, for DIN rail NS 35/15



URTK/S - Test disconnect terminal block

0311087

<https://www.phoenixcontact.com/ae/products/0311087>



NS 35/15-2,3 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201798

<https://www.phoenixcontact.com/ae/products/1201798>




DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver-colored

ZB 8:UNBEDRUCKT - Zack marker strip

1052002

<https://www.phoenixcontact.com/ae/products/1052002>



Zack marker strip, Strip, white, unmarked, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: latching, for terminal block width: 8.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 8.15 mm

URTK/S - Test disconnect terminal block

0311087


<https://www.phoenixcontact.com/ae/products/0311087>



ZB 8 CUS - Zack marker strip

0825011

<https://www.phoenixcontact.com/ae/products/0825011>



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, Number of individual labels: 10, text field height: 8.15 mm, text field width: 10.5 mm

UC-TM 8 - Marker for terminal blocks

0818072

<https://www.phoenixcontact.com/ae/products/0818072>



Marker for terminal blocks, Sheet, white, unmarked, can be labeled with: BLUEMARK E.CARD, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: latching, for terminal block width: 8.2 mm, Number of individual labels: 56, text field height: 10.5 mm, text field width: 7.6 mm

URTK/S - Test disconnect terminal block

0311087

<https://www.phoenixcontact.com/ae/products/0311087>

UC-TM 8 CUS - Marker for terminal blocks

0824597

<https://www.phoenixcontact.com/ae/products/0824597>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, Number of individual labels: 56, text field height: 10.5 mm, text field width: 7.6 mm

UCT-TM 8 - Marker for terminal blocks

0828740

<https://www.phoenixcontact.com/ae/products/0828740>



Marker for terminal blocks, Sheet, white, unmarked, can be labeled with: BLUEMARK E.CARD, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME 2.0, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, TOPMARK NEO, TOPMARK LASER, mounting type: latching, for terminal block width: 8.2 mm, Number of individual labels: 42, text field height: 10.5 mm, text field width: 7.6 mm

URTK/S - Test disconnect terminal block

0311087

<https://www.phoenixcontact.com/ae/products/0311087>

UCT-TM 8 CUS - Marker for terminal blocks

0829616

<https://www.phoenixcontact.com/ae/products/0829616>




Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, Number of individual labels: 42, text field height: 10.5 mm, text field width: 7.6 mm

ZB 8,LGS:FORTL.ZAHLEN - Zack marker strip

1052015

<https://www.phoenixcontact.com/ae/products/1052015>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: latching, for terminal block width: 8.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 8.15 mm

URTK/S - Test disconnect terminal block

0311087

<https://www.phoenixcontact.com/ae/products/0311087>

ZB 8,QR:FORTL.ZAHLEN - Zack marker strip

1052028

<https://www.phoenixcontact.com/ae/products/1052028>




Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: latching, for terminal block width: 8.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 8.15 mm

ZB 8,LGS:L1-N,PE - Marker for terminal blocks

1052413

<https://www.phoenixcontact.com/ae/products/1052413>



Marker for terminal blocks, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, mounting type: latching, for terminal block width: 8.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 8.15 mm

URTK/S - Test disconnect terminal block

0311087

<https://www.phoenixcontact.com/ae/products/0311087>

CLIPFIX 35 - End bracket

3022218

<https://www.phoenixcontact.com/ae/products/3022218>

Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray



CLIPFIX 35-5 - End bracket

3022276

<https://www.phoenixcontact.com/ae/products/3022276>

Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray



URTK/S - Test disconnect terminal block

0311087

<https://www.phoenixcontact.com/ae/products/0311087>




E/NS 35 N - End bracket

0800886

<https://www.phoenixcontact.com/ae/products/0800886>

End clamp, width: 9.5 mm, color: gray




E/UK - End bracket

1201442

<https://www.phoenixcontact.com/ae/products/1201442>

End bracket, material: PA, mounting type: NS 35/7,5, NS 35/15, color: gray



URTK/S - Test disconnect terminal block

0311087

<https://www.phoenixcontact.com/ae/products/0311087>



E/UK 1 - End bracket

1201413

<https://www.phoenixcontact.com/ae/products/1201413>



End clamps, for supporting the ends of double-level and three-level terminal blocks, width: 10 mm, color: gray

PSBJ 3,5/18/6 FARBLOS - Test plug strip

0311391

<https://www.phoenixcontact.com/ae/products/0311391>



Test plug strip, number of positions: 1, color: transparent

URTK/S - Test disconnect terminal block

0311087

<https://www.phoenixcontact.com/ae/products/0311087>



PSBJ 3,5/18/6 BK - Test plug strip

0311388

<https://www.phoenixcontact.com/ae/products/0311388>



Test plug strip, number of positions: 1, color: black

PSBJ 3,5/18/6 GY - Test plug strip

0311375

<https://www.phoenixcontact.com/ae/products/0311375>



Test plug strip, number of positions: 1, color: gray

URTK/S - Test disconnect terminal block

0311087

<https://www.phoenixcontact.com/ae/products/0311087>



PSBJ 3,5/18/6 VT - Test plug strip

0311362

<https://www.phoenixcontact.com/ae/products/0311362>



Test plug strip, number of positions: 1, color: violet

PSBJ 3,5/18/6 GN - Test plug strip

0311359

<https://www.phoenixcontact.com/ae/products/0311359>



Test plug strip, number of positions: 1, color: green

URTK/S - Test disconnect terminal block

0311087

<https://www.phoenixcontact.com/ae/products/0311087>



PSBJ 3,5/18/6 YE - Test plug strip

0311346

<https://www.phoenixcontact.com/ae/products/0311346>



Test plug strip, number of positions: 1, color: yellow

PSBJ 3,5/18/6 BU - Test plug strip

0311333

<https://www.phoenixcontact.com/ae/products/0311333>



Test plug strip, number of positions: 1, color: blue

URTK/S - Test disconnect terminal block

0311087

<https://www.phoenixcontact.com/ae/products/0311087>



PSBJ 3,5/18/6 RD - Test plug strip

0311320

<https://www.phoenixcontact.com/ae/products/0311320>



Test plug strip, number of positions: 1, color: red

PSBJ 3,5/18/6 WH - Test plug strip

0311317

<https://www.phoenixcontact.com/ae/products/0311317>



Test plug strip, number of positions: 1, color: white

URTK/S - Test disconnect terminal block

0311087

<https://www.phoenixcontact.com/ae/products/0311087>



PSBJ-URTK/S RD - Test plug strip

0311744

<https://www.phoenixcontact.com/ae/products/0311744>



Test plug strip, number of positions: 1, color: red

PSBJ-URTK/S BU - Test plug strip

0311757

<https://www.phoenixcontact.com/ae/products/0311757>



Test plug strip, number of positions: 1, color: blue

URTK/S - Test disconnect terminal block

0311087

<https://www.phoenixcontact.com/ae/products/0311087>

PSBJ-URTK/S YE - Test plug strip

0311731

<https://www.phoenixcontact.com/ae/products/0311731>



Test plug strip, number of positions: 1, color: yellow

PSBJ-URTK/S GN - Test plug strip

0311760

<https://www.phoenixcontact.com/ae/products/0311760>



Test plug strip, number of positions: 1, color: green

URTK/S - Test disconnect terminal block

0311087

<https://www.phoenixcontact.com/ae/products/0311087>

PSBJ-URTK/S VT - Test plug strip

0311773

<https://www.phoenixcontact.com/ae/products/0311773>



Test plug strip, number of positions: 1, color: violet

PSBJ-URTK/S BK - Test plug strip

0311728

<https://www.phoenixcontact.com/ae/products/0311728>



Test plug strip, number of positions: 1, color: black

URTK/S - Test disconnect terminal block

0311087

<https://www.phoenixcontact.com/ae/products/0311087>



SZS 1,0X4,0 VDE - Screwdriver

1205066

<https://www.phoenixcontact.com/ae/products/1205066>



Screwdriver, slot-headed, VDE insulated, size: 1.0 x 4.0 x 100 mm, 2-component grip, with non-slip grip

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT Middle East FZ LLC
1201N-1206N, Dubai Science Park Towers – North
P.O. Box 345002, Dubai, United Arab Emirates
(+971) 4 437-0324
info-me@phoenixcontact.com