

2940618

<https://www.phoenixcontact.com/pc/products/2940618>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



DIN rail power supply unit, secondary-switched, input 230 V AC, output 12-28 V DC/250 mA, pre-setting 24 V DC

Commercial data

Item number	2940618
Packing unit	1 pc
Minimum order quantity	1 pc
Product key	CMPL13
GTIN	4017918080174
Weight per piece (including packing)	525.5 g
Weight per piece (excluding packing)	525.5 g
Country of origin	DE

EG 45-PS-230AC/24DC/250 - Power supply



2940618

<https://www.phoenixcontact.com/pc/products/2940618>

Technical data

Product properties

Operating mode	100% operating factor
----------------	-----------------------

Electrical properties

Test voltage input/output	4 kV AC
---------------------------	---------

Input data

Input voltage	230 V AC
Voltage type of supply voltage	AC
AC frequency range	50 Hz ... 60 Hz
Mains buffering time	35 ms
Current consumption	approx. 60 mA
Nominal power consumption	approx. 12 VA
Input fuse	0.4 A (slow-blow TR 5, internal, solderable)

Output data

Nominal output voltage	12 V DC $\pm 2\%$ (can be set up to 28 V DC. Default 24 V DC $\pm 4\%$)
Nominal output current (I_N)	250 mA
Residual ripple	$< 100 \text{ mV}_{PP}$
Short-circuit-proof	yes
No-load proof	yes
Protective circuit	Electronic disconnect at $1.3 \times I_N$; Varistor

Connection data

Input

Connection method	COMBICON plug-in screw terminal block
Conductor cross-section, rigid min.	0.2 mm^2
Conductor cross-section, rigid max.	2.5 mm^2
Conductor cross-section flexible min.	0.2 mm^2
Conductor cross-section flexible max.	2.5 mm^2
Conductor cross-section AWG min.	24
Conductor cross-section AWG max.	14
Stripping length	8 mm
Screw thread	M3

Output

Connection method	COMBICON plug-in screw terminal block
Conductor cross-section, rigid min.	0.2 mm^2
Conductor cross-section, rigid max.	2.5 mm^2
Conductor cross-section flexible min.	0.2 mm^2
Conductor cross-section flexible max.	2.5 mm^2
Conductor cross-section AWG min.	24

EG 45-PS-230AC/24DC/250 - Power supply



2940618

<https://www.phoenixcontact.com/pc/products/2940618>

Conductor cross-section AWG max.	14
Stripping length	8 mm
Screw thread	M3

Dimensions

Width	45 mm
Height	107 mm
Depth	77 mm

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	0 °C ... 60 °C

Approvals

Conformity/Approvals

SIL in accordance with IEC 61508	0
----------------------------------	---

Standards and regulations

Standards


Standards/regulations	prEN 50178
	DIN EN 50178/VDE 0160
	DIN VDE 0106-101
	DIN VDE 0551

Mounting

Mounting type	DIN rail mounting
Assembly note	can be aligned with spacing = 10 mm
Mounting position	On horizontal DIN rail

Drawings


Diagram

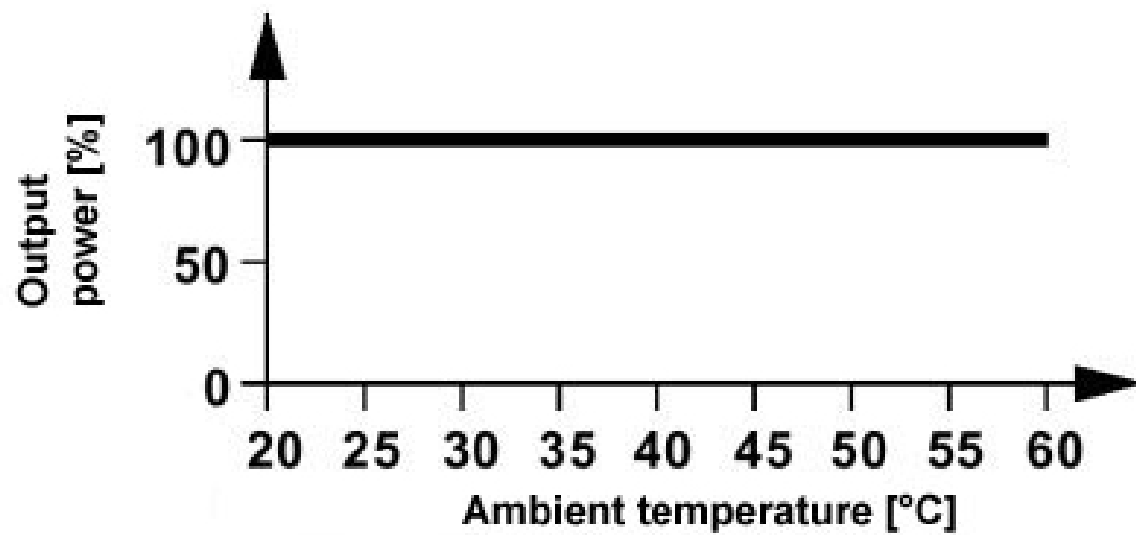

2940618

<https://www.phoenixcontact.com/pc/products/2940618>

Circuit diagram

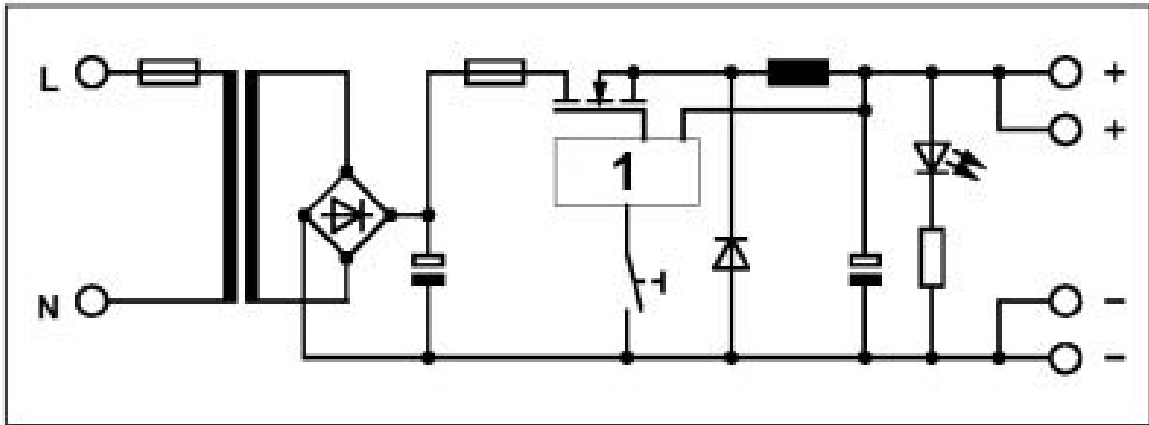

1 = switched-mode regulator

EG 45-PS-230AC/24DC/250 - Power supply



2940618

<https://www.phoenixcontact.com/pc/products/2940618>

Environmental product compliance

China RoHS

Environment friendly use period (EFUP)	EFUP-25
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG

Flachmarktstraße 8

D-32825 Blomberg

+49 (0) 5235-3 00

info@phoenixcontact.com