


# UT 2,5-3L - Multi-level terminal block



3214259

<https://www.phoenixcontact.com/pc/products/3214259>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Multi-level terminal block, nom. voltage: 500 V, nominal current: 19 A, connection method: Screw connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, mounting type: NS 35/7,5, NS 35/15, color: gray

## Your advantages

- Since function shafts are provided on each level, all potential distribution tasks can be implemented quickly
- For a clear overview, each terminal point supports large-surface labeling
- A very high wiring density is achieved with the compact three-level terminal blocks
- Tested for railway applications

## Commercial data

|                                      |               |
|--------------------------------------|---------------|
| Item number                          | 3214259       |
| Packing unit                         | 50 pc         |
| Minimum order quantity               | 50 pc         |
| Product key                          | BE1115        |
| GTIN                                 | 4046356575409 |
| Weight per piece (including packing) | 25.34 g       |
| Weight per piece (excluding packing) | 25 g          |
| Customs tariff number                | 85369010      |
| Country of origin                    | PL            |

# UT 2,5-3L - Multi-level terminal block



3214259

<https://www.phoenixcontact.com/pc/products/3214259>

## Technical data

### Product properties

|                       |                            |
|-----------------------|----------------------------|
| Product type          | Multi-level terminal block |
| Product family        | UT                         |
| Number of positions   | 1                          |
| Number of connections | 6                          |
| Number of rows        | 3                          |
| Potentials            | 3                          |

### Insulation characteristics

|                      |     |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution  | 3   |

### Electrical properties

|                                                 |        |
|-------------------------------------------------|--------|
| Rated surge voltage                             | 6 kV   |
| Maximum power dissipation for nominal condition | 0.77 W |

### Connection data

|                                 |                     |
|---------------------------------|---------------------|
| Number of connections per level | 2                   |
| Nominal cross section           | 2.5 mm <sup>2</sup> |
| Rated cross section AWG         | 12                  |

### Level 1+2+3

|                                                                   |                                                                                                                                                                |
|-------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Connection method                                                 | Screw connection                                                                                                                                               |
| Screw thread                                                      | M3                                                                                                                                                             |
| Tightening torque                                                 | 0.5 ... 0.6 Nm                                                                                                                                                 |
| Stripping length                                                  | 9 mm                                                                                                                                                           |
| Internal cylindrical gage                                         | A3                                                                                                                                                             |
| Connection in acc. with standard                                  | IEC 60947-7-1                                                                                                                                                  |
| Conductor cross-section rigid                                     | 0.14 mm <sup>2</sup> ... 4 mm <sup>2</sup>                                                                                                                     |
| Cross section AWG                                                 | 26 ... 12 (converted acc. to IEC)                                                                                                                              |
| Conductor cross-section flexible                                  | 0.14 mm <sup>2</sup> ... 4 mm <sup>2</sup>                                                                                                                     |
| Conductor cross-section, flexible [AWG]                           | 26 ... 12 (converted acc. to IEC)                                                                                                                              |
| Conductor cross-section flexible ultrasound-compressed            | 0.34 mm <sup>2</sup> ... 4 mm <sup>2</sup>                                                                                                                     |
| Conductor cross-section, flexible [AWG] ultrasound-compressed     | 22 ... 12 (converted acc. to IEC)                                                                                                                              |
| Conductor cross-section flexible (ferrule without plastic sleeve) | 0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>                                                                                                                   |
| Flexible conductor cross-section (ferrule with plastic sleeve)    | 0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>                                                                                                                   |
| Nominal current                                                   | 19 A (with a 2.5 mm <sup>2</sup> conductor cross-section)                                                                                                      |
| Maximum load current                                              | 24 A (in case of a 4 mm <sup>2</sup> conductor cross-section, the maximum load current must not be exceeded by the total current of all connected conductors.) |
| Nominal voltage                                                   | 500 V                                                                                                                                                          |
| Note                                                              | Note: Product releases, connection cross sections and notes on connecting aluminum cables can be found in the download area.                                   |

# UT 2,5-3L - Multi-level terminal block



3214259

<https://www.phoenixcontact.com/pc/products/3214259>

|                                  |                                                           |
|----------------------------------|-----------------------------------------------------------|
| Nominal cross section            | 2.5 mm <sup>2</sup>                                       |
| Connection in acc. with standard | IEC/EN 60079-7                                            |
| Conductor cross-section rigid    | 0.14 mm <sup>2</sup> ... 4 mm <sup>2</sup>                |
| Cross section AWG                | 26 ... 12 (converted acc. to IEC)                         |
| Conductor cross-section flexible | 0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>              |
| Maximum load current             | 28 A (with 4 mm <sup>2</sup> conductor cross-section)     |
|                                  | 22 A (with a 2.5 mm <sup>2</sup> conductor cross-section) |
| Nominal voltage                  | 690 V                                                     |
| Nominal cross section            | 4 mm <sup>2</sup>                                         |

## Dimensions

|                    |         |
|--------------------|---------|
| Width              | 5.2 mm  |
| End cover width    | 2.2 mm  |
| Height             | 90 mm   |
| Depth on NS 35/7,5 | 77.5 mm |
| Depth on NS 35/15  | 85 mm   |

## Material specifications

|                                                                         |                 |
|-------------------------------------------------------------------------|-----------------|
| Color                                                                   | gray (RAL 7042) |
| Flammability rating according to UL 94                                  | V0              |
| Insulating material group                                               | I               |
| Insulating material                                                     | PA              |
| Static insulating material application in cold                          | -60 °C          |
| Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21)) | 130 °C          |
| Relative insulation material temperature index (Elec., UL 746 B)        | 130 °C          |
| Fire protection for rail vehicles (DIN EN 45545-2) R22                  | HL 1 - HL 3     |
| Fire protection for rail vehicles (DIN EN 45545-2) R23                  | HL 1 - HL 3     |
| Fire protection for rail vehicles (DIN EN 45545-2) R24                  | HL 1 - HL 3     |
| Fire protection for rail vehicles (DIN EN 45545-2) R26                  | HL 1 - HL 3     |
| Calorimetric heat release NFPA 130 (ASTM E 1354)                        | 28 MJ/kg        |
| Surface flammability NFPA 130 (ASTM E 162)                              | passed          |
| Specific optical density of smoke NFPA 130 (ASTM E 662)                 | passed          |
| Smoke gas toxicity NFPA 130 (SMP 800C)                                  | passed          |

## Mechanical properties

### Mechanical data

|                 |     |
|-----------------|-----|
| Open side panel | Yes |
|-----------------|-----|

## Environmental and real-life conditions

### Ambient conditions

|                                 |                                                                                                                              |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------|
| Ambient temperature (operation) | -60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.) |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------|

# UT 2,5-3L - Multi-level terminal block



3214259

<https://www.phoenixcontact.com/pc/products/3214259>

|                                          |                                                                           |
|------------------------------------------|---------------------------------------------------------------------------|
| Ambient temperature (storage/transport)  | -25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C) |
| Ambient temperature (assembly)           | -5 °C ... 70 °C                                                           |
| Ambient temperature (actuation)          | -5 °C ... 70 °C                                                           |
| Permissible humidity (operation)         | 20 % ... 90 %                                                             |
| Permissible humidity (storage/transport) | 30 % ... 70 %                                                             |

## Standards and regulations

|                                  |                |
|----------------------------------|----------------|
| Connection in acc. with standard | IEC 60947-7-1  |
|                                  | IEC/EN 60079-7 |

## Mounting

|               |           |
|---------------|-----------|
| Mounting type | NS 35/7,5 |
|               | NS 35/15  |

# UT 2,5-3L - Multi-level terminal block




3214259

<https://www.phoenixcontact.com/pc/products/3214259>

## Drawings

Circuit diagram

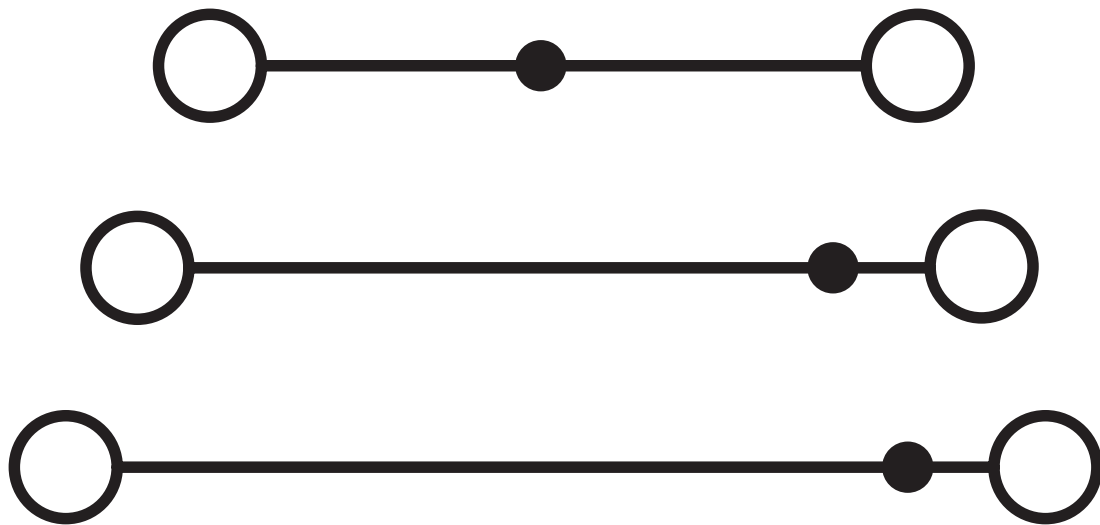

# UT 2,5-3L - Multi-level terminal block



3214259

<https://www.phoenixcontact.com/pc/products/3214259>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/3214259>



**EAC**

Approval ID: KZ7500651131219505



**CSA**

Approval ID: 13631

|   | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
|---|-----------------------|-----------------------|-------------------|-----------------------------|
| B |                       |                       |                   |                             |
|   | 300 V                 | 20 A                  | 26 - 12           | -                           |
| C |                       |                       |                   |                             |
|   | 300 V                 | 20 A                  | 26 - 12           | -                           |
| D |                       |                       |                   |                             |
|   | 600 V                 | 5 A                   | 26 - 12           | -                           |



**cULus Recognized**

Approval ID: E60425

|   | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
|---|-----------------------|-----------------------|-------------------|-----------------------------|
| B |                       |                       |                   |                             |
|   | 300 V                 | 20 A                  | 26 - 12           | -                           |
| C |                       |                       |                   |                             |
|   | 300 V                 | 20 A                  | 26 - 12           | -                           |
| D |                       |                       |                   |                             |
|   | 600 V                 | 5 A                   | 26 - 12           | -                           |

# UT 2,5-3L - Multi-level terminal block



3214259

<https://www.phoenixcontact.com/pc/products/3214259>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-13.0 | 27250102 |
| ECLASS-15.0 | 27250102 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC000897 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

# UT 2,5-3L - Multi-level terminal block



3214259

<https://www.phoenixcontact.com/pc/products/3214259>

## Environmental product compliance

### EU RoHS

|                                         |      |
|-----------------------------------------|------|
| Fulfills EU RoHS substance requirements | Yes  |
| Exemption                               | 6(c) |

### China RoHS

|                                        |                                                                                                                                                                                                                                   |
|----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Environment friendly use period (EFUP) | EFUP-50                                                                                                                                                                                                                           |
|                                        | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

### EU REACH SVHC

|                                     |                                      |
|-------------------------------------|--------------------------------------|
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1)                 |
| SCIP                                | a15bf94e-5141-4b89-b56d-1047cb128122 |

### EF3.0 Climate Change

|         |               |
|---------|---------------|
| CO2e kg | 0.098 kg CO2e |
|---------|---------------|

# UT 2,5-3L - Multi-level terminal block

3214259

<https://www.phoenixcontact.com/pc/products/3214259>

## Accessories

**i** Note: Applying some accessories below might limit this product.

### FBS 2-5 - Plug-in bridge

3030161

<https://www.phoenixcontact.com/pc/products/3030161>



Plug-in bridge, pitch: 5.2 mm, number of positions: 2, length: 23 mm, color: red

**i** Max. current carrying capacity: 19 A

---

### FBS 3-5 - Plug-in bridge

3030174

<https://www.phoenixcontact.com/pc/products/3030174>



Plug-in bridge, pitch: 5.2 mm, number of positions: 3, length: 23 mm, color: red

**i** Max. current carrying capacity: 19 A

# UT 2,5-3L - Multi-level terminal block

3214259

<https://www.phoenixcontact.com/pc/products/3214259>



## FBS 4-5 - Plug-in bridge

3030187

<https://www.phoenixcontact.com/pc/products/3030187>



Plug-in bridge, pitch: 5.2 mm, number of positions: 4, length: 23 mm, color: red

 Max. current carrying capacity: 19 A

---

## FBS 5-5 - Plug-in bridge

3030190

<https://www.phoenixcontact.com/pc/products/3030190>



Plug-in bridge, pitch: 5.2 mm, number of positions: 5, length: 23 mm, color: red

 Max. current carrying capacity: 19 A

# UT 2,5-3L - Multi-level terminal block

3214259

<https://www.phoenixcontact.com/pc/products/3214259>



## FBS 10-5 - Plug-in bridge

3030213

<https://www.phoenixcontact.com/pc/products/3030213>

Plug-in bridge, pitch: 5.2 mm, number of positions: 10, length: 23 mm, color: red



 Max. current carrying capacity: 19 A

---

## FBS 20-5 - Plug-in bridge

3030226

<https://www.phoenixcontact.com/pc/products/3030226>

Plug-in bridge, pitch: 5.2 mm, number of positions: 20, color: red



 Max. current carrying capacity: 19 A

# UT 2,5-3L - Multi-level terminal block

3214259

<https://www.phoenixcontact.com/pc/products/3214259>



## FBS 50-5 - Plug-in bridge

3038930

<https://www.phoenixcontact.com/pc/products/3038930>



Plug-in bridge, pitch: 5.2 mm, number of positions: 50, color: red

 Max. current carrying capacity: 19 A

---

## FBSR 2-5 - Plug-in bridge

3033702

<https://www.phoenixcontact.com/pc/products/3033702>



Plug-in bridge, pitch: 5.2 mm, number of positions: 2, color: red

 Max. current carrying capacity: 17.5 A

# UT 2,5-3L - Multi-level terminal block



3214259

<https://www.phoenixcontact.com/pc/products/3214259>

## FBSR 3-5 - Plug-in bridge

3001591

<https://www.phoenixcontact.com/pc/products/3001591>



Plug-in bridge, pitch: 5.2 mm, number of positions: 3, color: red

 Max. current carrying capacity: 17.5 A

---

## FBSR 4-5 - Plug-in bridge

3001592

<https://www.phoenixcontact.com/pc/products/3001592>



Plug-in bridge, pitch: 5.2 mm, number of positions: 4, color: red

 Max. current carrying capacity: 17.5 A

# UT 2,5-3L - Multi-level terminal block

3214259

<https://www.phoenixcontact.com/pc/products/3214259>



## FBSR 5-5 - Plug-in bridge

3001593

<https://www.phoenixcontact.com/pc/products/3001593>



Plug-in bridge, pitch: 5.2 mm, number of positions: 5, color: red

 Max. current carrying capacity: 17.5 A

---

## FBSR 10-5 - Plug-in bridge

3033710

<https://www.phoenixcontact.com/pc/products/3033710>



Plug-in bridge, pitch: 5.2 mm, number of positions: 10, color: red

 Max. current carrying capacity: 17.5 A

# UT 2,5-3L - Multi-level terminal block

3214259

<https://www.phoenixcontact.com/pc/products/3214259>



## FBS 2-5 BU - Plug-in bridge

3036877

<https://www.phoenixcontact.com/pc/products/3036877>



Plug-in bridge, pitch: 5.2 mm, number of positions: 2, color: blue

 Max. current carrying capacity: 19 A

---

## FBS 3-5 BU - Plug-in bridge

3036880

<https://www.phoenixcontact.com/pc/products/3036880>



Plug-in bridge, pitch: 5.2 mm, number of positions: 3, color: blue

 Max. current carrying capacity: 19 A

# UT 2,5-3L - Multi-level terminal block

3214259

<https://www.phoenixcontact.com/pc/products/3214259>



## FBS 4-5 BU - Plug-in bridge

3036893

<https://www.phoenixcontact.com/pc/products/3036893>



Plug-in bridge, pitch: 5.2 mm, number of positions: 4, color: blue

 Max. current carrying capacity: 19 A

---

## FBS 5-5 BU - Plug-in bridge

3036903

<https://www.phoenixcontact.com/pc/products/3036903>



Plug-in bridge, pitch: 5.2 mm, number of positions: 5, color: blue

 Max. current carrying capacity: 19 A

# UT 2,5-3L - Multi-level terminal block

3214259

<https://www.phoenixcontact.com/pc/products/3214259>



## FBS 10-5 BU - Plug-in bridge

3036916

<https://www.phoenixcontact.com/pc/products/3036916>



Plug-in bridge, pitch: 5.2 mm, number of positions: 10, color: blue

 Max. current carrying capacity: 19 A

---

## FBS 20-5 BU - Plug-in bridge

3036929

<https://www.phoenixcontact.com/pc/products/3036929>



Plug-in bridge, pitch: 5.2 mm, number of positions: 20, color: blue

 Max. current carrying capacity: 19 A

## UT 2,5-3L - Multi-level terminal block

3214259

<https://www.phoenixcontact.com/pc/products/3214259>



## FBS 50-5 BU - Plug-in bridge

3032114

<https://www.phoenixcontact.com/pc/products/3032114>



Plug-in bridge, pitch: 5.2 mm, number of positions: 50, color: blue

 Max. current carrying capacity: 19 A

---

## RB ST 10-(2,5/4) - Reducing bridge

3030873

<https://www.phoenixcontact.com/pc/products/3030873>



Reducing bridge, pitch: 10 mm, number of positions: 2, length: 36 mm, color: red

 Max. current carrying capacity: 35 A

# UT 2,5-3L - Multi-level terminal block

3214259

<https://www.phoenixcontact.com/pc/products/3214259>

## RB UT 10-(2,5/4) - Reducing bridge

3047060

<https://www.phoenixcontact.com/pc/products/3047060>



Reducing bridge, pitch: 10.2 mm, number of positions: 2, length: 29 mm, color: red

 Max. current carrying capacity: 40 A

---

## RB UT 35-(2,5/4) - Reducing bridge

3047277

<https://www.phoenixcontact.com/pc/products/3047277>



Reducing bridge, pitch: 11 mm, number of positions: 2, color: red

 Max. current carrying capacity: 40 A

# UT 2,5-3L - Multi-level terminal block

3214259

<https://www.phoenixcontact.com/pc/products/3214259>



## RB UT 16-(2,5/4) - Reducing bridge

3047073

<https://www.phoenixcontact.com/pc/products/3047073>



Reducing bridge, pitch: 11 mm, number of positions: 2, length: 31 mm, color: red

 Max. current carrying capacity: 40 A

---

## RB UT 6-(2,5/4) - Reducing bridge

3047251

<https://www.phoenixcontact.com/pc/products/3047251>



Reducing bridge, pitch: 9.5 mm, number of positions: 2, length: 25 mm, color: red

 Max. current carrying capacity: 40 A

# UT 2,5-3L - Multi-level terminal block



3214259

<https://www.phoenixcontact.com/pc/products/3214259>

## D-UT 2,5-3L - End cover

3214314

<https://www.phoenixcontact.com/pc/products/3214314>

End cover, depth: 69.8 mm, width: 2.2 mm, height: 90 mm, color: gray



---

## TP-UK - Partition plate

3003046

<https://www.phoenixcontact.com/pc/products/3003046>

Partition plate, depth: 90 mm, width: 2 mm, height: 99 mm, color: gray



## UT 2,5-3L - Multi-level terminal block

3214259

<https://www.phoenixcontact.com/pc/products/3214259>



## P-CO 2-5 R47K - Component connector

3032447

<https://www.phoenixcontact.com/pc/products/3032447>



Component connector, with 47 kOhm resistance for wire-break monitoring, pitch: 5.2 mm, depth: 34.8 mm, width: 4.1 mm, height: 8.9 mm, number of positions: 2, color: black

---

## LPO 2,5/E - Pick-off plug

3270516

<https://www.phoenixcontact.com/pc/products/3270516>



Pick-off plug, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, color: gray

# UT 2,5-3L - Multi-level terminal block

3214259

<https://www.phoenixcontact.com/pc/products/3214259>



## LPO 2,5 - Pick-off plug

3270517

<https://www.phoenixcontact.com/pc/products/3270517>



Pick-off plug, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## LPS-5/E - Service connector

3270520

<https://www.phoenixcontact.com/pc/products/3270520>



Service connector, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: red

## UT 2,5-3L - Multi-level terminal block

3214259

<https://www.phoenixcontact.com/pc/products/3214259>



## LPS-5 - Service connector

3270521

<https://www.phoenixcontact.com/pc/products/3270521>



Service connector, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: red

---

## NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

<https://www.phoenixcontact.com/pc/products/0801733>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

## UT 2,5-3L - Multi-level terminal block

3214259

<https://www.phoenixcontact.com/pc/products/3214259>



## NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

<https://www.phoenixcontact.com/pc/products/0801681>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver-colored

---

## NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

<https://www.phoenixcontact.com/pc/products/1204119>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, white passivated, Standard profile, color: silver-colored

## UT 2,5-3L - Multi-level terminal block

3214259

<https://www.phoenixcontact.com/pc/products/3214259>



## NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

<https://www.phoenixcontact.com/pc/products/1204122>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, white passivated, Standard profile, color: silver-colored

---

## NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

<https://www.phoenixcontact.com/pc/products/0801704>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver-colored

# UT 2,5-3L - Multi-level terminal block

3214259

<https://www.phoenixcontact.com/pc/products/3214259>



## NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

<https://www.phoenixcontact.com/pc/products/1206421>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver-colored

---

## NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

<https://www.phoenixcontact.com/pc/products/1206434>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver-colored

# UT 2,5-3L - Multi-level terminal block

3214259

<https://www.phoenixcontact.com/pc/products/3214259>



## NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

<https://www.phoenixcontact.com/pc/products/0801762>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

---

## NS 35/ 7,5 CAP - End cap

1206560

<https://www.phoenixcontact.com/pc/products/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



## UT 2,5-3L - Multi-level terminal block

3214259

<https://www.phoenixcontact.com/pc/products/3214259>



### ZB 5 :UNBEDRUCKT - Zack marker strip

1050004

<https://www.phoenixcontact.com/pc/products/1050004>



Zack marker strip, Strip, white, unmarked, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: latching, for terminal block width: 5.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 5.1 mm

---

### ZB 5 CUS - Zack marker strip

0824962

<https://www.phoenixcontact.com/pc/products/0824962>



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 5.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 5.15 mm

## UT 2,5-3L - Multi-level terminal block

3214259

<https://www.phoenixcontact.com/pc/products/3214259>



### ZB 5,LGS:FORTL.ZAHLEN - Zack marker strip

1050017

<https://www.phoenixcontact.com/pc/products/1050017>



Zack marker strip, Strip, white, labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: latching, for terminal block width: 5.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 5.15 mm

---

### ZB 5,QR:FORTL.ZAHLEN - Zack marker strip

1050020

<https://www.phoenixcontact.com/pc/products/1050020>



Zack marker strip, Strip, white, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: latching, for terminal block width: 5.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 5.15 mm

## UT 2,5-3L - Multi-level terminal block

3214259

<https://www.phoenixcontact.com/pc/products/3214259>



### ZB 5,LGS:GLEICHE ZAHLEN - Zack marker strip

1050033

<https://www.phoenixcontact.com/pc/products/1050033>




Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: Identical numbers 1 or 2, etc. up to 100, mounting type: latching, for terminal block width: 5.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 5.15 mm

---

### ZB 5,LGS:L1-N,PE - Zack marker strip

1050415

<https://www.phoenixcontact.com/pc/products/1050415>



Zack marker strip, Strip, white, labeled, horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, mounting type: latching, for terminal block width: 5.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 5.15 mm

## UT 2,5-3L - Multi-level terminal block

3214259

<https://www.phoenixcontact.com/pc/products/3214259>



### UC-TM 5 - Marker for terminal blocks

0818108

<https://www.phoenixcontact.com/pc/products/0818108>



Marker for terminal blocks, Sheet, white, unmarked, can be labeled with: BLUEMARK E.CARD, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: latching, for terminal block width: 5.2 mm, Number of individual labels: 96, text field height: 10.5 mm, text field width: 4.6 mm

---

### UC-TM 5 CUS - Marker for terminal blocks

0824581

<https://www.phoenixcontact.com/pc/products/0824581>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 5.2 mm, Number of individual labels: 96, text field height: 4.6 mm, text field width: 10.5 mm

## UT 2,5-3L - Multi-level terminal block

3214259

<https://www.phoenixcontact.com/pc/products/3214259>



### UCT-TM 5 - Marker for terminal blocks

0828734

<https://www.phoenixcontact.com/pc/products/0828734>



Marker for terminal blocks, Sheet, white, unmarked, can be labeled with: BLUEMARK E.CARD, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME 2.0, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, TOPMARK NEO, TOPMARK LASER, mounting type: latching, for terminal block width: 5.2 mm, Number of individual labels: 72, text field height: 10.5 mm, text field width: 4.6 mm

---

### UCT-TM 5 CUS - Marker for terminal blocks

0829595

<https://www.phoenixcontact.com/pc/products/0829595>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 5.2 mm, Number of individual labels: 72, text field height: 10.5 mm, text field width: 4.6 mm

## UT 2,5-3L - Multi-level terminal block

3214259

<https://www.phoenixcontact.com/pc/products/3214259>



### GBS 5-25X12 - Group marker label for terminal marking

0810588

<https://www.phoenixcontact.com/pc/products/0810588>



Group marker label, snaps onto terminal center for screw, spring-cage and quick connection terminal blocks, labeled with a 25 x 12 mm label or manually with the B-STIFT, in the foot part with ZB 5

---

### GBS 5-25X5 - Group marker label for terminal marking

0829126

<https://www.phoenixcontact.com/pc/products/0829126>



Group marking label, can be snapped into terminal center for screw, spring-cage, push-in, and fast connection terminal blocks, can be labeled with a 24 x 4 mm label or manually using B-STIFT, in the foot part with ZB 5

## UT 2,5-3L - Multi-level terminal block

3214259

<https://www.phoenixcontact.com/pc/products/3214259>



### MPS-MT - Test plug

0201744

<https://www.phoenixcontact.com/pc/products/0201744>



Test plug, with solder connection up to 1 mm<sup>2</sup> conductor cross-section, number of positions: 1, color: gray

---

### MPS-IH WH - Insulating sleeve

0201663

<https://www.phoenixcontact.com/pc/products/0201663>

Insulating sleeve, color: white



## UT 2,5-3L - Multi-level terminal block

3214259

<https://www.phoenixcontact.com/pc/products/3214259>



### MPS-IH RD - Insulating sleeve

0201676

<https://www.phoenixcontact.com/pc/products/0201676>

Insulating sleeve, color: red




---

### MPS-IH BU - Insulating sleeve

0201689

<https://www.phoenixcontact.com/pc/products/0201689>

Insulating sleeve, color: blue



## UT 2,5-3L - Multi-level terminal block

3214259

<https://www.phoenixcontact.com/pc/products/3214259>



### MPS-IH YE - Insulating sleeve

0201692

<https://www.phoenixcontact.com/pc/products/0201692>

Insulating sleeve, color: yellow



---

### MPS-IH GN - Insulating sleeve

0201702

<https://www.phoenixcontact.com/pc/products/0201702>

Insulating sleeve, color: green



## UT 2,5-3L - Multi-level terminal block

3214259

<https://www.phoenixcontact.com/pc/products/3214259>



### MPS-IH GY - Insulating sleeve

0201728

<https://www.phoenixcontact.com/pc/products/0201728>

Insulating sleeve, color: gray



---

### MPS-IH BK - Insulating sleeve

0201731

<https://www.phoenixcontact.com/pc/products/0201731>

Insulating sleeve, color: black



## UT 2,5-3L - Multi-level terminal block

3214259

<https://www.phoenixcontact.com/pc/products/3214259>



### PAI-4-FIX-5/6 BU - Test adapter

3035975

<https://www.phoenixcontact.com/pc/products/3035975>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

---

### PAI-4-FIX-5/6 OG - Test adapter

3035974

<https://www.phoenixcontact.com/pc/products/3035974>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

## UT 2,5-3L - Multi-level terminal block

3214259

<https://www.phoenixcontact.com/pc/products/3214259>



### PAI-4-FIX-5/6 YE - Test adapter

3035977

<https://www.phoenixcontact.com/pc/products/3035977>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

---

### PAI-4-FIX-5/6 RD - Test adapter

3035976

<https://www.phoenixcontact.com/pc/products/3035976>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

# UT 2,5-3L - Multi-level terminal block

3214259

<https://www.phoenixcontact.com/pc/products/3214259>



## PAI-4-FIX-5/6 GN - Test adapter

3035978

<https://www.phoenixcontact.com/pc/products/3035978>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

---

## PAI-4-FIX-5/6 BK - Test adapter

3035980

<https://www.phoenixcontact.com/pc/products/3035980>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

## UT 2,5-3L - Multi-level terminal block

3214259

<https://www.phoenixcontact.com/pc/products/3214259>



### PAI-4-FIX-5/6 GY - Test adapter

3035982

<https://www.phoenixcontact.com/pc/products/3035982>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

---

### PAI-4-FIX-5/6 VT - Test adapter

3035979

<https://www.phoenixcontact.com/pc/products/3035979>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

## UT 2,5-3L - Multi-level terminal block

3214259

<https://www.phoenixcontact.com/pc/products/3214259>



### PAI-4-FIX-5/6 BN - Test adapter

3035981

<https://www.phoenixcontact.com/pc/products/3035981>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

---

### PAI-4-FIX-5/6 WH - Test adapter

3035983

<https://www.phoenixcontact.com/pc/products/3035983>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

## UT 2,5-3L - Multi-level terminal block

3214259

<https://www.phoenixcontact.com/pc/products/3214259>



## PS-5 - Test plug

3030983

<https://www.phoenixcontact.com/pc/products/3030983>

Test plug, Modular test plug, number of positions: 1, color: red



---

## DP PS-5 - Spacer plate

3036725

<https://www.phoenixcontact.com/pc/products/3036725>

Spacer plate, depth: 29 mm, width: 5.2 mm, height: 22.4 mm, number of positions: 1, color: red



## UT 2,5-3L - Multi-level terminal block

3214259

<https://www.phoenixcontact.com/pc/products/3214259>



## PS-5/2,3MM RD - Test plug

3038723

<https://www.phoenixcontact.com/pc/products/3038723>



Test plug, number of positions: 1, color: red

---

## E/AL-NS 35 - End bracket

1201662

<https://www.phoenixcontact.com/pc/products/1201662>



End clamp, for end support of UKH 50 to UKH 240, is pushed onto DIN rail NS 35 and fixed with 2 screws, width: 10 mm, color: aluminum

## UT 2,5-3L - Multi-level terminal block

3214259

<https://www.phoenixcontact.com/pc/products/3214259>



## SZS 0,6X3,5 - Screwdriver

1205053

<https://www.phoenixcontact.com/pc/products/1205053>



Actuation tool, for ST terminal blocks, insulated, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

---

## X-PEN 0,35 - Marker pen

0811228

<https://www.phoenixcontact.com/pc/products/0811228>



Marker pen without ink cartridge, for manual labeling of markers, labeling extremely wipe-proof, line thickness 0.35 mm

# UT 2,5-3L - Multi-level terminal block

3214259

<https://www.phoenixcontact.com/pc/products/3214259>



## SF-SL 0,6X3,5-100 S-VDE - Screwdriver

1212587

<https://www.phoenixcontact.com/pc/products/1212587>



Actuation tool, for ST terminal blocks, VDE insulated, with slimmer insulation integrated in the blade, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

---

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG

Flachsmarktstraße 8

D-32825 Blomberg

+49 (0) 5235-3 00

[info@phoenixcontact.com](mailto:info@phoenixcontact.com)