

VAL-MS-EE-T1/T2-3+1-335-FM - Lightning/surge arrester type 1/2



2910550

<https://www.phoenixcontact.com/it/products/2910550>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Universal varistor-based plug-in lightning/surge arrester for 3-phase power supply networks with separate N and PE (5-conductor system: L1, L2, L3, N, PE), for Lightning Protection Levels III and IV, with remote indication contact.

Commercial data

Item number	2910550
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	CLP
Product key	CLP121
GTIN	4055626462318
Weight per piece (including packing)	669 g
Weight per piece (excluding packing)	643.8 g
Customs tariff number	85363030
Country of origin	DE

VAL-MS-EE-T1/T2-3+1-335-FM - Lightning/surge arrester type 1/2



2910550

<https://www.phoenixcontact.com/it/products/2910550>

Technical data

Product properties

IEC test classification	I / II
	T1 / T2
EN type	T1 / T2
IEC power supply system	TT
	TN-S
Type	DIN rail module, two-section, divisible
Number of positions	4
Surge protection fault message	Optical, remote indicator contact

Insulation characteristics

Overvoltage category	III
Pollution degree	2

Electrical properties

Nominal frequency f_N	50 Hz (60 Hz)
-------------------------	---------------

Indicator/remote signaling

Connection name	Remote fault indicator contact
Switching function	Changeover contact
Operating voltage	5 V AC ... 250 V AC
	30 V DC
Operating current	5 mA AC ... 1.5 A AC
	1 A DC

Connection data

Connection method	Screw connection
Screw thread	M5
Tightening torque	3 Nm (1.5 mm ² ... 16 mm ²)
	4.5 Nm (25 mm ² ... 35 mm ²)
Stripping length	16 mm
Conductor cross-section flexible	1.5 mm ² ... 25 mm ²
Conductor cross-section rigid	1.5 mm ² ... 35 mm ²
Conductor cross-section AWG	15 ... 2
Connection method	Biconnect terminal blocks
Conductor cross-section flexible	1.5 mm ² ... 16 mm ²

Remote fault indicator contact

Connection method	Plug-in/screw connection via COMBICON
Screw thread	M2
Tightening torque	0.25 Nm


VAL-MS-EE-T1/T2-3+1-335-FM - Lightning/surge arrester type 1/2

2910550

<https://www.phoenixcontact.com/it/products/2910550>

Stripping length	7 mm
Conductor cross-section flexible	0.14 mm ² ... 1.5 mm ²
Conductor cross-section rigid	0.14 mm ² ... 1.5 mm ²
Conductor cross-section AWG	28 ... 16

Dimensions

Dimensional drawing	
Width	71.2 mm
Height	98.7 mm
Depth	77.5 mm (incl. DIN rail 7.5 mm)
Horizontal pitch	4 Div.

Material specifications

Color	traffic gray B (RAL 7043)
Flammability rating according to UL 94	V-0
CTI value of material	600
Insulating material	PA 6.6/PBT
Material group	I
Housing material	PA 6.6 PBT

Mechanical properties

Mechanical data

Open side panel	No
-----------------	----

Protective circuit

Mode of protection	L-N
	L-PE
	N-PE
Direction of action	3L-N & N-PE
Nominal voltage U_N	240/415 V AC (TN-S)
	240/415 V AC (TT)
Nominal frequency f_N	50 Hz (60 Hz)
Maximum continuous operating voltage U_C (L-N)	335 V AC
Maximum continuous operating voltage U_C (L-PE)	335 V AC
Maximum continuous operating voltage U_C (N-PE)	264 V AC
Rated load current I_L	80 A
Protective conductor current I_{PE}	$\leq 5 \mu A$

VAL-MS-EE-T1/T2-3+1-335-FM - Lightning/surge arrester type 1/2



2910550

<https://www.phoenixcontact.com/it/products/2910550>

Standby power consumption P_C	$\leq 810 \text{ mVA}$
Nominal discharge current I_n (8/20) μs (L-N)	12.5 kA
Nominal discharge current I_n (8/20) μs (L-PE)	12.5 kA
Nominal discharge current I_n (8/20) μs (N-PE)	50 kA
Maximum discharge current $I_{\max}$ (8/20) μs	50 kA
Impulse discharge current (10/350) μs (L-N), charge	6.25 As
Impulse discharge current (10/350) μs (L-N), specific energy	39 kJ/ Ω
Impulse discharge current (10/350) μs (L-N), peak current value I_{imp}	12.5 kA
Impulse discharge current (10/350) μs (L-PE), charge	6.25 As
Impulse discharge current (10/350) μs (L-PE), specific energy	39 kJ/ Ω
Impulse discharge current (10/350) μs (L-PE), peak current value I_{imp}	12.5 kA
Impulse discharge current (10/350) μs (N-PE), charge	25 As
Impulse discharge current (10/350) μs (N-PE), specific energy	625 kJ/ Ω
Impulse discharge current (10/350) μs (N-PE), peak current value I_{imp}	50 kA
Total discharge current I_{Total} (8/20) μs	50 kA
Total discharge current I_{Total} (10/350) μs	50 kA
Follow current interrupt rating I_{fi} (N-PE)	100 A
Short-circuit current rating I_{SCCR}	25 kA
Voltage protection level U_p (L-N)	$\leq 1.2 \text{ kV}$
	$\leq 1.6 \text{ kV}$ (30 kA - 8/20 μs)
Voltage protection level U_p (L-PE)	$\leq 2 \text{ kV}$
Voltage protection level U_p (N-PE)	$\leq 1.7 \text{ kV}$
Residual voltage U_{res} (L-N)	$\leq 1.2 \text{ kV}$ (at I_n)
	$\leq 1.1 \text{ kV}$ (at 10 kA)
	$\leq 1 \text{ kV}$ (at 5 kA)
	$\leq 0.9 \text{ kV}$ (at 3 kA)
Residual voltage U_{res} (L-PE)	$\leq 2 \text{ kV}$ (at I_n)
	$\leq 1.5 \text{ kV}$ (at 10 kA)
	$\leq 1.2 \text{ kV}$ (at 5 kA)
	$\leq 1.1 \text{ kV}$ (at 3 kA)
Residual voltage U_{res} (N-PE)	$\leq 0.6 \text{ kV}$ (at I_n)
	$\leq 0.5 \text{ kV}$ (at 10 kA)
	$\leq 0.5 \text{ kV}$ (at 5 kA)
	$\leq 0.4 \text{ kV}$ (at 3 kA)
TOV behavior at U_T (L-N)	415 V AC (5 s / withstand mode)
	457 V AC (120 min / safe failure mode)
TOV behavior at U_T (N-PE)	1200 V AC (200 ms / withstand mode)
Response time t_A (L-N)	$\leq 25 \text{ ns}$
Response time t_A (L-PE)	$\leq 100 \text{ ns}$
Response time t_A (N-PE)	$\leq 100 \text{ ns}$

VAL-MS-EE-T1/T2-3+1-335-FM - Lightning/surge arrester type 1/2



2910550

<https://www.phoenixcontact.com/it/products/2910550>

Max. backup fuse with V-type through wiring	80 A (gG - 16 mm ²)
Max. backup fuse with branch wiring	160 A (gG)

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20 (only when all terminal points are used)
Ambient temperature (operation)	-40 °C ... 80 °C
Ambient temperature (storage/transport)	-40 °C ... 80 °C
Altitude	≤ 2000 m (amsl)
Permissible humidity (operation)	5 % ... 95 %
Shock (operation)	30g (Half-sine / 11 ms / 3x ±X, ±Y, ±Z)
Vibration (operation)	7.5g (10 ... 500 Hz / 2.5 h / X, Y, Z)

Standards and regulations

Standards/specifications	IEC 61643-11
Note	2011
Standards/specifications	EN 61643-11
Note	2012

Mounting

Mounting type	DIN rail: 35 mm
---------------	-----------------


VAL-MS-EE-T1/T2-3+1-335-FM - Lightning/surge arrester type 1/2

2910550


<https://www.phoenixcontact.com/it/products/2910550>

Drawings

Dimensional drawing

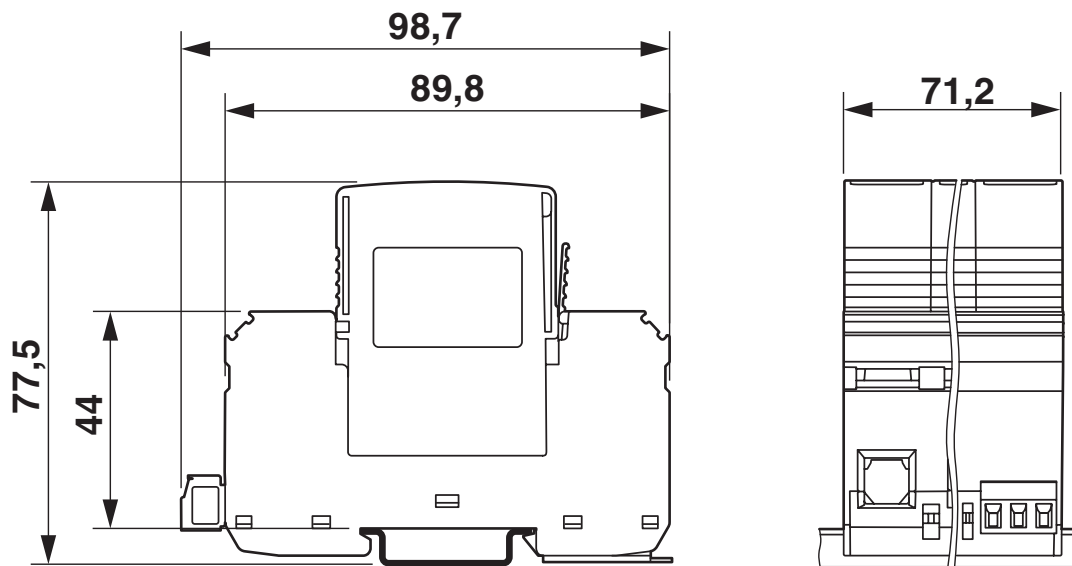

Circuit diagram

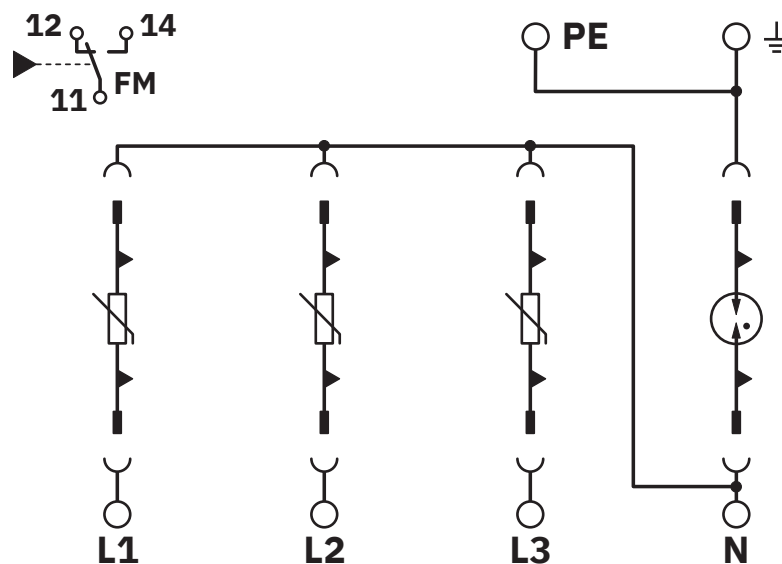

VAL-MS-EE-T1/T2-3+1-335-FM - Lightning/surge arrester type 1/2



2910550

<https://www.phoenixcontact.com/lt/products/2910550>

Approvals

📄 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/lt/products/2910550>

UAE-RoHS

Approval ID: 23-10-88705

VAL-MS-EE-T1/T2-3+1-335-FM - Lightning/surge arrester type 1/2



2910550

<https://www.phoenixcontact.com/it/products/2910550>

Classifications

ECLASS

ECLASS-13.0	27171201
ECLASS-15.0	27171201

ETIM

ETIM 9.0	EC000381
----------	----------

UNSPSC

UNSPSC 21.0	39121600
-------------	----------

VAL-MS-EE-T1/T2-3+1-335-FM - Lightning/surge arrester type 1/2



2910550
<https://www.phoenixcontact.com/it/products/2910550>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%
EF3.1 Climate Change	
CO2e kg	10.618 kg CO2e

VAL-MS-EE-T1/T2-3+1-335-FM - Lightning/surge arrester type 1/2



2910550

<https://www.phoenixcontact.com/lt/products/2910550>

Accessories

ZBN 18 CUS - Zack marker strip

0825059

<https://www.phoenixcontact.com/lt/products/0825059>



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 18 mm, Number of individual labels: 5, text field height: 5 mm, text field width: 18 mm

ZBN 18,LGS:ERDE - Marker for terminal blocks

2749589

<https://www.phoenixcontact.com/lt/products/2749589>



Marker for terminal blocks, Strip, white, labeled, horizontal: Grounding symbol, mounting type: latching, for terminal block width: 18 mm, Number of individual labels: 5, text field height: 5 mm, text field width: 18 mm

VAL-MS-EE-T1/T2-3+1-335-FM - Lightning/surge arrester type 1/2



2910550

<https://www.phoenixcontact.com/lt/products/2910550>

ZBN 18,LGS:L1-N,ERDE - Marker for terminal blocks

2749576

<https://www.phoenixcontact.com/lt/products/2749576>



Marker for terminal blocks, Strip, white, labeled, horizontal: L1, L2, L3, N, GND, mounting type: latching, for terminal block width: 18 mm, Number of individual labels: 5, text field height: 5 mm, text field width: 18 mm

ZBN 18:UNBEDRUCKT - Zack marker strip

2809128

<https://www.phoenixcontact.com/lt/products/2809128>



Zack marker strip, Strip, white, unmarked, can be labeled with: CMS-P1-PLOTTER, PLOTMARK, mounting type: latching, for terminal block width: 18 mm, Number of individual labels: 5, text field height: 5 mm, text field width: 18 mm

VAL-MS-EE-T1/T2-3+1-335-FM - Lightning/surge arrester type 1/2



2910550

<https://www.phoenixcontact.com/lt/products/2910550>

DK-BIC-35 - Feed-through terminal block

2749880

<https://www.phoenixcontact.com/lt/products/2749880>

Feed-through terminal block for VAL and FLT applications



B-STIFT - Marker pen

1051993

<https://www.phoenixcontact.com/lt/products/1051993>

Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm



VAL-MS-EE-T1/T2-3+1-335-FM - Lightning/surge arrester type 1/2



2910550

<https://www.phoenixcontact.com/lt/products/2910550>

SZK PZ2 VDE - Screwdriver

1206463

<https://www.phoenixcontact.com/lt/products/1206463>



Screwdriver, PZ crosshead, VDE insulated, size: PZ 2 x 100 mm, 2-component grip, with non-slip grip

VAL-MS-EE-T1/T2-335-P - Type 1/2 surge protection plug

2910556

<https://www.phoenixcontact.com/lt/products/2910556>



L-N replacement plug for VAL-MS-T1/T2 335/12.5 plug-in lighting/surge arrester.

VAL-MS-EE-T1/T2-3+1-335-FM - Lightning/surge arrester type 1/2



2910550

<https://www.phoenixcontact.com/lt/products/2910550>

F-MS-EE-T1/T2-50-P - Type 1/2 surge protection plug

2910557

<https://www.phoenixcontact.com/lt/products/2910557>



N-PE replacement plug for VAL-MS-T1/T2 335/12.5 plug-in lighting/surge arrester.

Phoenix Contact 2026 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact UAB
Svitrigailos str. 11B
03228 Vilnius
+370 5 2106321
balticinfo@phoenixcontact.com