

GD170-PV Series


Solar Pump Controller



GD170-PV Series Solar Pump Controller



- Hybrid operation AC supply & PV supply
- Advanced MPPT algorithms
- High efficiency and stability
- Effective protection function
- Intelligent IOT
- Drive multi types of pumps (PMSM, AM, Single phase motors, etc)

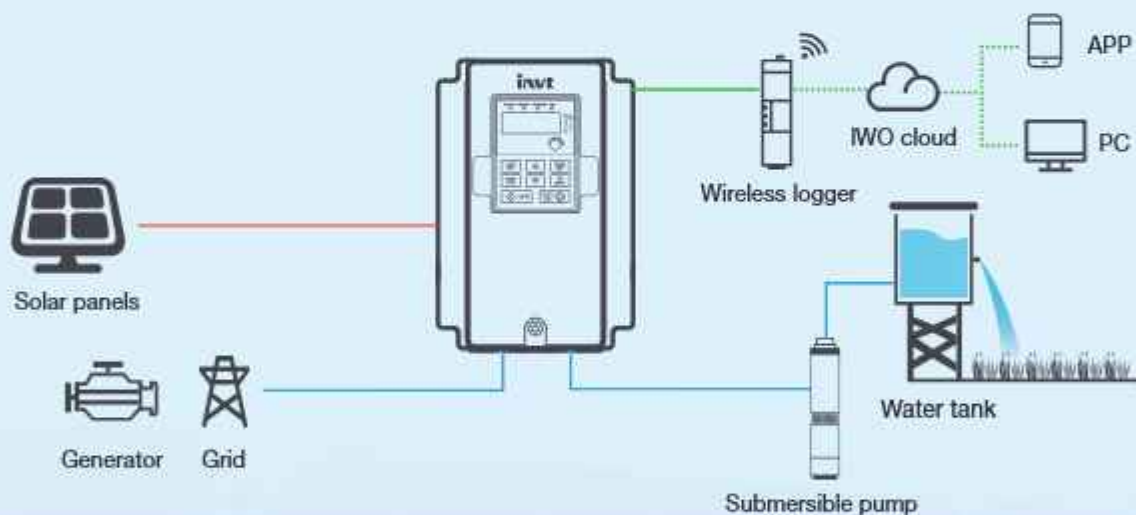

Application scenarios



Grassland animal husbandry



Desert management



Agricultural irrigation



Domestic water use

Product Specification

DC input	
Max DC voltage(V)	800
Start voltage(V)	300
Min. work voltage(V)	250
Recommended MPPT voltage(V)	300~750
Recommended input work voltage(V)	550
AC input	
Input voltage(Vac)	3PH 380 -15% ~440 +10% -4
	3PH 220 -15% ~240 +10% -2
	1PH 220 -15% ~240 +10% -S2 & -SS2
Input frequency(Hz)	47~63
AC output	
Output voltage(Vac)	0-input voltage
Output frequency(Hz)	0-400
Control performance	
Control method	V/F (SVPWM)
Pump type	Asynchronous synchronous and single phase motor.
Overload capability	120% of rated current: 1 minute
	150% of rated current: 10 seconds
Others	
Protective degree	IP20
Cooling method	Forced air cooling
Interface	LED keypad
Professional function	
Protection function	Low water level, overload, overcurrent, overvoltage, weak sunlight alarm, overheating, etc.
MPPT function	Automatic factory setting
Auto run/stop	Sleep when the light is weak, and wake up when the light is strong
Water level monitor	Sleep when the water is full, and wake up when the water level is low
Certification	
Certification standard	CE

Product Parameters

Voltage	Model	Rated output power (kW)	Max. DC input current (A)	Rated input current (A)	Rated output current (A)	Product dimension (mm)
1PH 220V Input/output	GD170-0R4-SS2-PV	0.4	9	6.5	4.2	80*160*123.5
	GD170-0R7-SS2-PV	0.75	9	9.3	7.2	80*185*140.5
	GD170-1R5-SS2-PV	1.5	12	15.7	10.2	
	GD170-2R2-SS2-PV	2.2	12	24	14	80*160*123.5
1PH 220V	GD170-0R4-S2-PV	0.4	9	6.5	2.5	
	GD170-0R7-S2-PV	0.75	9	9.3	4.2	
	GD170-1R5-S2-PV	1.5	12	15.7	7.5	
	GD170-2R2-S2-PV	2.2	12	24	10	80*185*140.5
3PH 220V	GD170-1R5-2-PV	1.5	12	7.7	7.5	
	GD170-2R2-2-PV	2.2	12	11	10	146*256*167
	GD170-004-2-PV	4.0	20	17	16	170*320*196.3
	GD170-5R5-2-PV	5.5	30	25	20	
	GD170-7R5-2-PV	7.5	40	33	30	

Voltage	Model	Rated output power (kW)	Max. DC input current (A)	Rated input current (A)	Rated output current (A)	Product dimension (mm)
3PH 380V	GD170-0R7-4-PV	0.75	9	3.4	2.5	80*185*140.5
	GD170-1R5-4-PV	1.5	9	5	4.2	
	GD170-2R2-4-PV	2.2	12	5.8	5.5	
	GD170-004-4-PV	4.0	16.5	13.5	9.5	
	GD170-5R5-4-PV	5.5	23.9	19.5	14	146*256*167
	GD170-7R5-4-PV	7.5	30.6	25	18.5	
	GD170-011-4-PV	11	39.2	32	25	
	GD170-015-4-PV	15	49	40	32	170*320*196.3
	GD170-018-4-PV	18.5	50	47	38	
	GD170-022-4-PV	22	60	51	45	200*340.6*184.3
	GD170-030-4-PV	30	81	70	60	
	GD170-037-4-PV	37	90	80	75	250*400*202
	GD170-045-4-PV	45	130	98	92	
	GD170-055-4-PV	55	150	128	115	282*560*238
	GD170-075-4-PV	75	200	139	150	
	GD170-090-4-PV	90	250	168	180	338*554*326
	GD170-110-4-PV	110	300	201	215	
	GD170-132-4-PV	132	360	265	260	500*870*360
	GD170-160-4-PV	160	430	310	305	
	GD170-185-4-PV	185	500	345	340	500*870*358
	GD170-200-4-PV	200	550	385	380	
	GD170-220-4-PV	220	480	430	425	750*1410*380
	GD170-250-4-PV	250	525	485	480	

Note: Power range up to 500kW

Online Platform

INVT solar water pump remote monitoring platform. Option 4G & WIFI data logger.


4G standard version


WIFI version



Reactor

When the distance between the controller and motor is longer than 50m, we suggest adding an output reactor.



Model	Output reactor	Dimension (mm)
GD170-1R5-2-PV	OCL2-004-4	110*84*130
GD170-2R2-2-PV	OCL2-004-4	110*84*130
GD170-004-2-PV	OCL2-5R5-4	155*76*140
GD170-5R5-2-PV	OCL2-7R5-4	155*76*165
GD170-7R5-2-PV	OCL2-015-4	155*135*130
GD170-0R7-4-PV	OCL2-1R5-4	110*84*130
GD170-1R5-4-PV	OCL2-1R5-4	110*84*130
GD170-2R2-4-PV	OCL2-2R2-4	110*84*130
GD170-004-4-PV	OCL2-004-4	110*84*130
GD170-5R5-4-PV	OCL2-5R5-4	155*76*140
GD170-7R5-4-PV	OCL2-7R5-4	155*76*165
GD170-011-4-PV	OCL2-011-4	155*135*130
GD170-015-4-PV	OCL2-015-4	155*135*130
GD170-018-4-PV	OCL2-018-4	155*135*130
GD170-022-4-PV	OCL2-022-4	195*130*165
GD170-030-4-PV	OCL2-037-4	195*130*165
GD170-037-4-PV	OCL2-037-4	195*130*165
GD170-045-4-PV	OCL2-045-4	195*135*165
GD170-055-4-PV	OCL2-055-4	250*170*230
GD170-075-4-PV	OCL2-075-4	250*175*230
GD170-090-4-PV	OCL2-110-4	250*175*230
GD170-110-4-PV	OCL2-110-4	250*175*230
GD170-132-4-PV	OCL2-160-4	290*190*250
GD170-160-4-PV	OCL2-200-4	290*190*250
GD170-185-4-PV	OCL2-200-4	290*190*250
GD170-200-4-PV	OCL2-200-4	290*190*250
GD170-220-4-PV	OCL2-280-4	320*212*320
GD170-250-4-PV	OCL2-280-4	320*212*320
GD170-280-4-PV	OCL2-350-4	320*240*340
GD170-315-4-PV	OCL2-350-4	320*240*340
GD170-355-4-PV	OCL2-400-4	320*240*320
GD170-400-4-PV	OCL2-400-4	320*240*320
GD170-450-4-PV	OCL2-500-4	385*250*395
GD170-500-4-PV	OCL2-500-4	385*250*395



Your trusted industry automation solution provider



E-mail: overseas@invt.com.cn Website: www.invt.com

SHENZHEN INVT ELECTRIC CO.,LTD. INVT Guangming Technology Building, Songbai Road, Matian, Guangming District, Shenzhen, China

Industrial Automation:

- HMI
- PLC
- VFD
- Servo System
- Elevator Intelligent Control System
- Rail Transit Traction System

Electric Power:

- UPS
- DCIM
- Solar Inverter
- New Energy Vehicle Powertrain System
- New Energy Vehicle Charging System
- New Energy Vehicle Motor

INVT Copyright.
Information may be subject to change without notice during product improving.

00003-00315 202402(V1.1)